
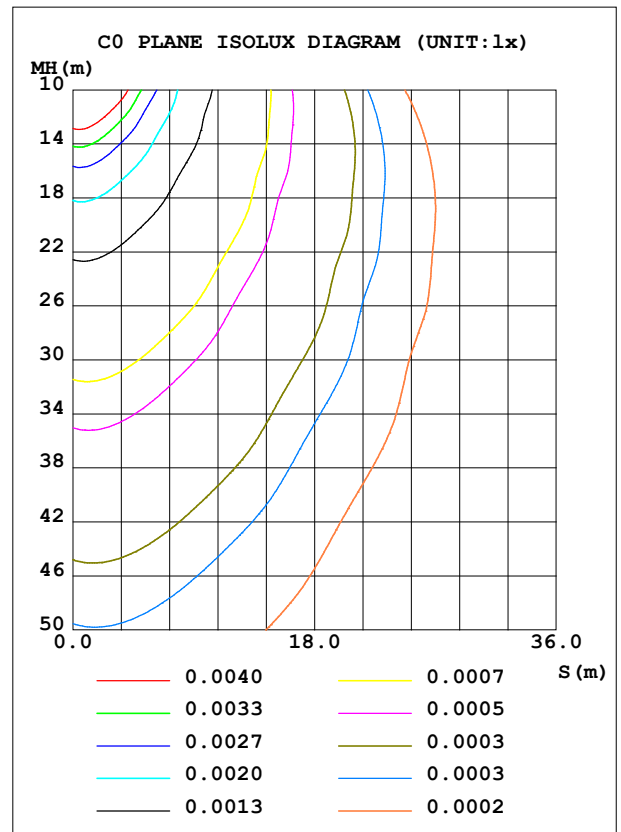


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.38V I:0.0774A P:9.9436W PF:0.5831 Freq:50.00Hz Lamp Flux:1005.7x1 lm		
NAME: 壁灯	TYPE: W系列	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 101.14 lm/W
MODEL	W07B	I <sub>max</sub> (cd)	4072	S/MH (C0/180)	0.94	
NOMINAL POWER (W)	5*2	LOR (%)	100.0	S/MH (C90/270)	50.61	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1005.7	η UP, DN (C0-180)	21.0, 28.4	
NOMINAL FLUX (lm)	1005.7	CIE CLASS	DIFFUSE	η UP, DN (C180-360)	21.4, 29.2	
LAMPS INSIDE	1	η up (%)	42.4	CIBSE SHR NOM	0.50	
TEST VOLTAGE (V)	219.5	η down (%)	57.6	CIBSE SHR MAX	0.60	

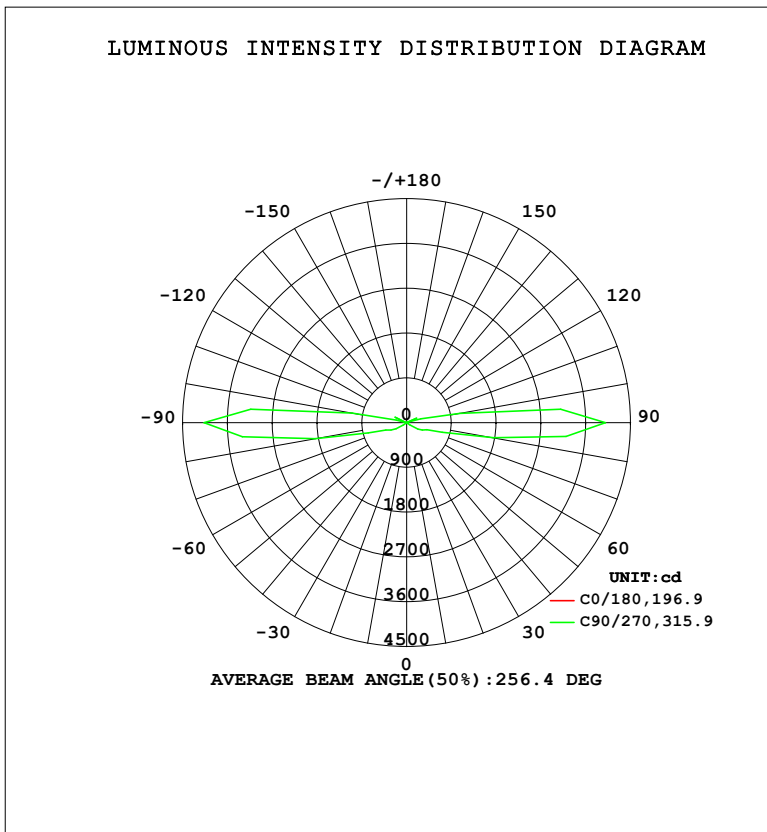

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-11-16

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 9.401m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	0.3688	0.4975	0.6904	0.5122	0.3436	0.5052	0.6213	0.5051	0- 10	0.0419	0.0419	0.00,0.00
20	0.3151	0.6609	1.075	0.7053	0.2863	0.6761	1.015	0.6240	10- 20	0.1496	0.1915	0.02,0.02
30	0.2685	0.9355	2.708	0.9428	0.2398	0.9512	3.091	0.8618	20- 30	0.3497	0.5412	0.05,0.05
40	0.2363	1.699	5.131	1.425	0.2112	1.852	5.593	1.561	30- 40	0.8772	1.418	0.14,0.14
50	0.2256	3.066	15.91	2.627	0.2076	3.433	15.97	3.024	40- 50	1.906	3.324	0.33,0.33
60	0.2255	4.032	261.4	3.378	0.2076	4.182	246.7	3.944	50- 60	12.11	15.43	1.53,1.53
70	0.2255	4.872	431.3	3.698	0.2076	4.858	446.9	4.420	60- 70	56.12	71.55	7.11,7.11
80	0.2255	5.318	1777	4.136	0.2076	5.103	1870	4.872	70- 80	145.5	217.1	21.6,21.6
90	0.2148	5.393	3993	4.219	0.2040	5.383	4072	4.886	80- 90	361.9	578.9	57.6,57.6
100	0.2041	3.214	1085	2.107	0.1861	2.396	1116	2.269	90-100	327.6	906.5	90.1,90.1
110	0.1790	3.946	38.01	2.981	0.1825	3.707	36.01	3.329	100-110	72.16	978.7	97.3,97.3
120	0.1611	2.618	27.29	2.579	0.1647	2.969	38.28	2.738	110-120	23.57	1002	99.7,99.7
130	0.1468	1.063	4.471	1.123	0.1432	1.158	3.661	0.9347	120-130	2.432	1005	99.9,99.9
140	0.1396	0.4314	1.919	0.4686	0.1324	0.4449	1.660	0.1708	130-140	0.6650	1005	100,100
150	0.1396	0.1488	0.7182	0.1783	0.1145	0.1336	0.4458	0.0817	140-150	0.2374	1006	100,100
160	0.1396	0.0744	0.1402	0.1411	0.1074	0.0223	0.1135	0	150-160	0.0726	1006	100,100
170	0.1396	0.0445	0.0612	0.0965	0.1074	0.0222	0.0700	0	160-170	0.0236	1006	100,100
180	0.1145	0	0	0.0149	0.1074	0	0	0	170-180	0.0071	1006	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2.1657 lm

%lum = 0.2%

%lamp = 0.2%

Conical surface Flux(130deg): 36.262 lm

%lum = 3.6%


%lamp = 3.6%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-11-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:220.38V I:0.0774A P:9.9436W PF:0.5831 Freq:50.00Hz Lamp Flux:1005.7x1 lm		
NAME: 壁灯	TYPE: W系列	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:

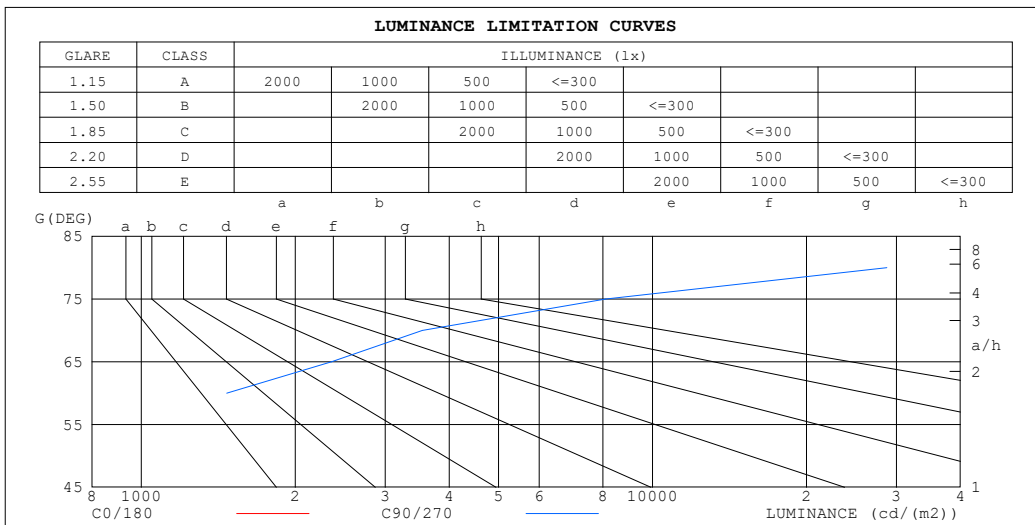

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	17	103788
80	9	28750
75	6	8092
70	5	3544
65	4	2354
60	3	1469
55	3	387
50	2	70
45	2	28


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-11-16

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 9.401m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:220.38V I:0.0774A P:9.9436W PF:0.5831 Freq:50.00Hz Lamp Flux:1005.7x1 lm		
NAME: 壁灯	TYPE: W系列	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.09	1.09	1.09	1.01	1.01	1.01	.88	.88	.88	.75	.75	.75	.63	.63	.63	.58
1.0	.74	.64	.55	.67	.58	.50	.54	.47	.41	.43	.37	.32	.32	.27	.23	.17
2.0	.59	.48	.38	.54	.43	.34	.43	.34	.27	.33	.26	.20	.23	.18	.13	.08
3.0	.50	.38	.29	.45	.34	.26	.36	.27	.20	.27	.20	.14	.19	.13	.08	.04
4.0	.44	.32	.23	.39	.29	.21	.31	.22	.16	.23	.16	.11	.16	.11	.06	.02
5.0	.38	.27	.19	.35	.25	.17	.28	.19	.13	.21	.14	.09	.15	.09	.05	.01
6.0	.34	.24	.16	.31	.21	.14	.25	.17	.11	.19	.12	.07	.13	.08	.04	.01
7.0	.31	.21	.14	.28	.19	.12	.22	.15	.09	.17	.11	.06	.12	.07	.03	.00
8.0	.28	.18	.12	.25	.17	.11	.20	.13	.08	.16	.10	.05	.12	.07	.03	.00
9.0	.25	.17	.10	.23	.15	.09	.19	.12	.07	.15	.09	.05	.11	.06	.03	.00
10.0	.23	.15	.09	.21	.13	.08	.17	.11	.06	.14	.08	.04	.10	.06	.02	.00

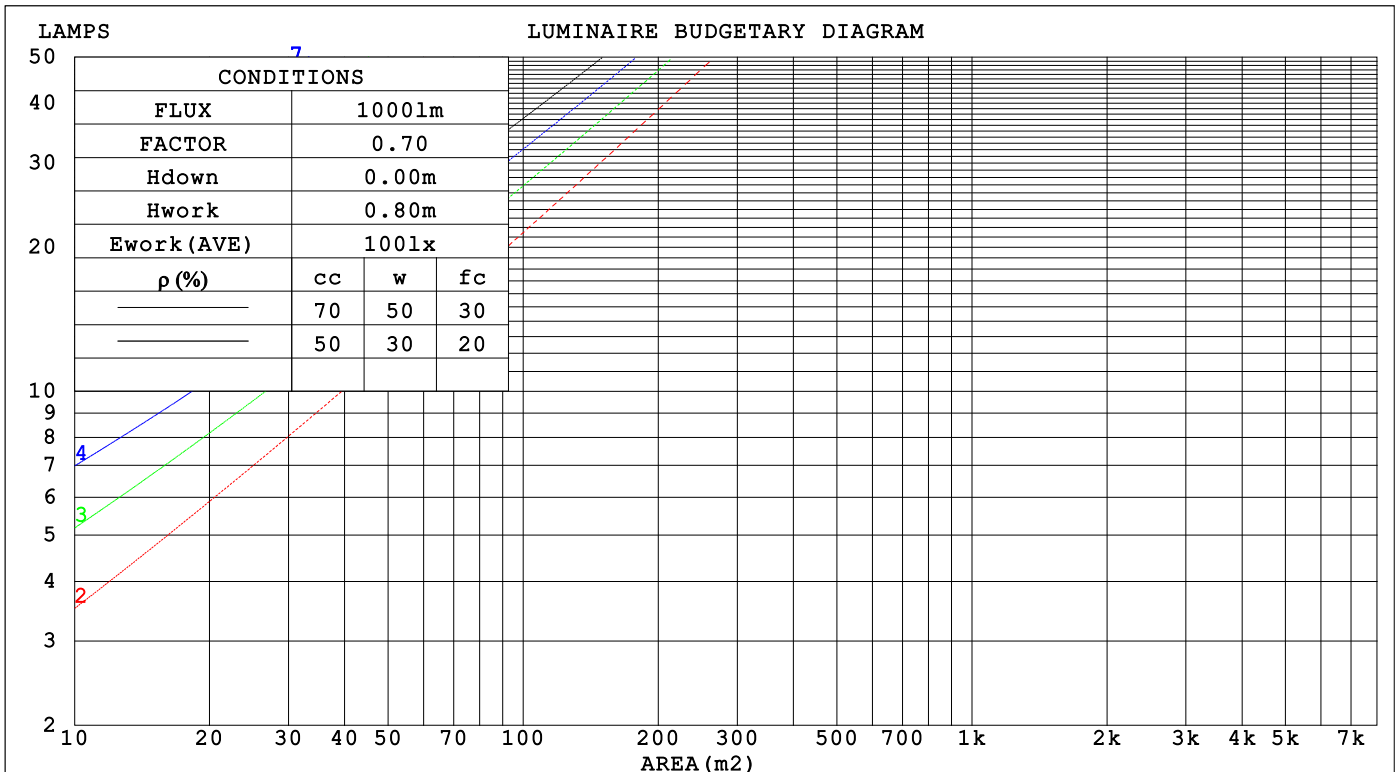

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-11-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:220.38V I:0.0774A P:9.9436W PF:0.5831 Freq:50.00Hz Lamp Flux:1005.7x1 lm								
NAME: 壁灯			TYPE: W系列			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.: 156.5mm			Shielding Angle:		

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.696	.396	.125	.675	.385	.122	.636	.365	.117	.600	.346	.111	.567	.329	.106	
2.0	.492	.269	.083	.473	.260	.080	.437	.243	.075	.404	.227	.071	.373	.211	.067	
3.0	.391	.208	.062	.373	.200	.060	.341	.185	.056	.311	.170	.052	.283	.157	.048	
4.0	.328	.170	.050	.312	.163	.048	.282	.150	.045	.255	.137	.041	.229	.125	.038	
5.0	.284	.145	.042	.270	.138	.040	.243	.126	.037	.217	.115	.034	.194	.104	.031	
6.0	.252	.126	.036	.238	.120	.035	.213	.109	.032	.190	.099	.029	.168	.089	.026	
7.0	.226	.112	.032	.214	.107	.030	.191	.097	.028	.170	.087	.025	.149	.078	.023	
8.0	.206	.101	.028	.195	.096	.027	.173	.087	.025	.153	.078	.022	.135	.069	.020	
9.0	.189	.091	.026	.179	.087	.024	.159	.079	.022	.140	.070	.020	.123	.062	.018	
10.0	.175	.084	.023	.165	.080	.022	.147	.072	.020	.129	.064	.018	.113	.057	.016	

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.514	.514	.514	.439	.439	.439	.300	.300	.300	.172	.172	.172	.055	.055	.055	
1.0	.533	.479	.430	.456	.411	.370	.312	.283	.256	.180	.164	.149	.058	.053	.048	
2.0	.527	.459	.402	.451	.395	.347	.309	.273	.242	.178	.159	.142	.057	.051	.046	
3.0	.518	.445	.387	.444	.384	.336	.305	.267	.235	.176	.156	.139	.057	.051	.045	
4.0	.508	.434	.378	.436	.375	.328	.300	.261	.231	.173	.153	.137	.056	.050	.045	
5.0	.498	.425	.372	.428	.368	.323	.294	.257	.228	.171	.151	.135	.055	.049	.045	
6.0	.489	.418	.367	.420	.362	.320	.290	.253	.226	.168	.149	.134	.054	.049	.044	
7.0	.480	.412	.364	.413	.357	.317	.285	.250	.225	.166	.147	.134	.054	.048	.044	
8.0	.472	.406	.361	.407	.353	.315	.281	.247	.223	.164	.146	.133	.053	.048	.044	
9.0	.465	.402	.359	.401	.349	.313	.278	.245	.222	.162	.145	.133	.052	.048	.044	
10.0	.458	.398	.357	.395	.345	.312	.274	.243	.222	.160	.144	.132	.052	.047	.044	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-11-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:220.38V I:0.0774A P:9.9436W PF:0.5831 Freq:50.00Hz										
Lamp Flux:1005.7x1 lm										
NAME: 壁灯			TYPE: W系列				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.:			
MFR.: EVERFINE			SUR.: 156.5mm				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-22.8	-21.5	-22.0	-20.6	-19.5	8.7	10.0	9.5	10.9	12.0
3H	-21.3	-20.1	-20.5	-19.2	-18.1	15.2	16.5	16.1	17.4	18.5
4H	-20.4	-19.1	-19.5	-18.2	-17.1	20.0	21.2	20.8	22.1	23.2
6H	-19.2	-18.0	-18.3	-17.1	-16.0	28.9	30.0	29.7	31.0	32.1
8H	-18.5	-17.4	-17.7	-16.5	-15.3	33.4	34.5	34.2	35.4	36.6
12H	-17.8	-16.7	-16.9	-15.7	-14.5	37.1	38.2	38.0	39.1	40.3
4H 2H	-2.2	-1.0	-1.4	-0.1	1.1	8.6	9.8	9.4	10.7	11.8
3H	-2.5	-1.4	-1.7	-0.5	0.7	15.9	17.0	16.8	17.9	19.1
4H	-2.7	-1.7	-1.8	-0.7	0.5	20.7	21.7	21.5	22.6	23.8
6H	-2.9	-1.9	-2.0	-1.0	0.3	29.3	30.3	30.2	31.2	32.5
8H	-3.0	-2.0	-2.1	-1.1	0.2	33.9	34.8	34.8	35.8	37.0
12H	-3.1	-2.2	-2.1	-1.2	0.1	37.9	38.8	38.9	39.8	41.1
8H 4H	8.8	9.7	9.7	10.6	11.9	20.5	21.4	21.4	22.4	23.6
6H	8.6	9.4	9.5	10.4	11.6	29.1	30.0	30.1	31.0	32.2
8H	8.5	9.2	9.4	10.2	11.5	33.8	34.6	34.7	35.6	36.8
12H	8.4	9.1	9.3	10.1	11.4	38.2	38.9	39.1	39.9	41.2
12H 4H	12.8	13.7	13.7	14.6	15.9	20.4	21.3	21.3	22.2	23.5
6H	12.8	13.5	13.7	14.5	15.8	29.1	29.8	30.0	30.8	32.1
8H	12.7	13.4	13.6	14.4	15.7	33.7	34.4	34.7	35.4	36.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.3 / - 0.5					+ 0.4 / - 0.3				
1.5H	+ 0.6 / - 0.4					+ 1.0 / - 0.7				
2.0H	+ 2.2 / - 1.5					+ 1.3 / - 0.9				

CIE Pub.117, 1006 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.0)  
 Area: 0.245 m2

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-11-16

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:220.38V I:0.0774A P:9.9436W PF:0.5831 Freq:50.00Hz Lamp Flux:1005.7x1 lm		
NAME: 壁灯	TYPE: W系列	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	30	16	8	29	15	7	27	14	7	0
0.80	36	20	10	35	19	10	31	18	9	0
1.00	41	24	12	39	23	12	35	23	11	1
1.25	47	28	16	44	27	15	39	24	13	1
1.50	51	32	19	48	30	18	42	27	16	2
2.00	58	39	25	54	37	24	46	32	21	5
2.50	63	45	31	59	42	29	50	36	25	7
3.00	67	50	36	62	46	33	53	40	29	10
4.00	74	57	44	68	53	41	58	46	35	14
5.00	78	63	50	72	58	47	61	50	40	17
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-11-16

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 5.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 9.401m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:220.38V I:0.0774A P:9.9436W PF:0.5831 Freq:50.00Hz Lamp Flux:1005.7x1 lm		
NAME: 壁灯	TYPE: W系列	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:

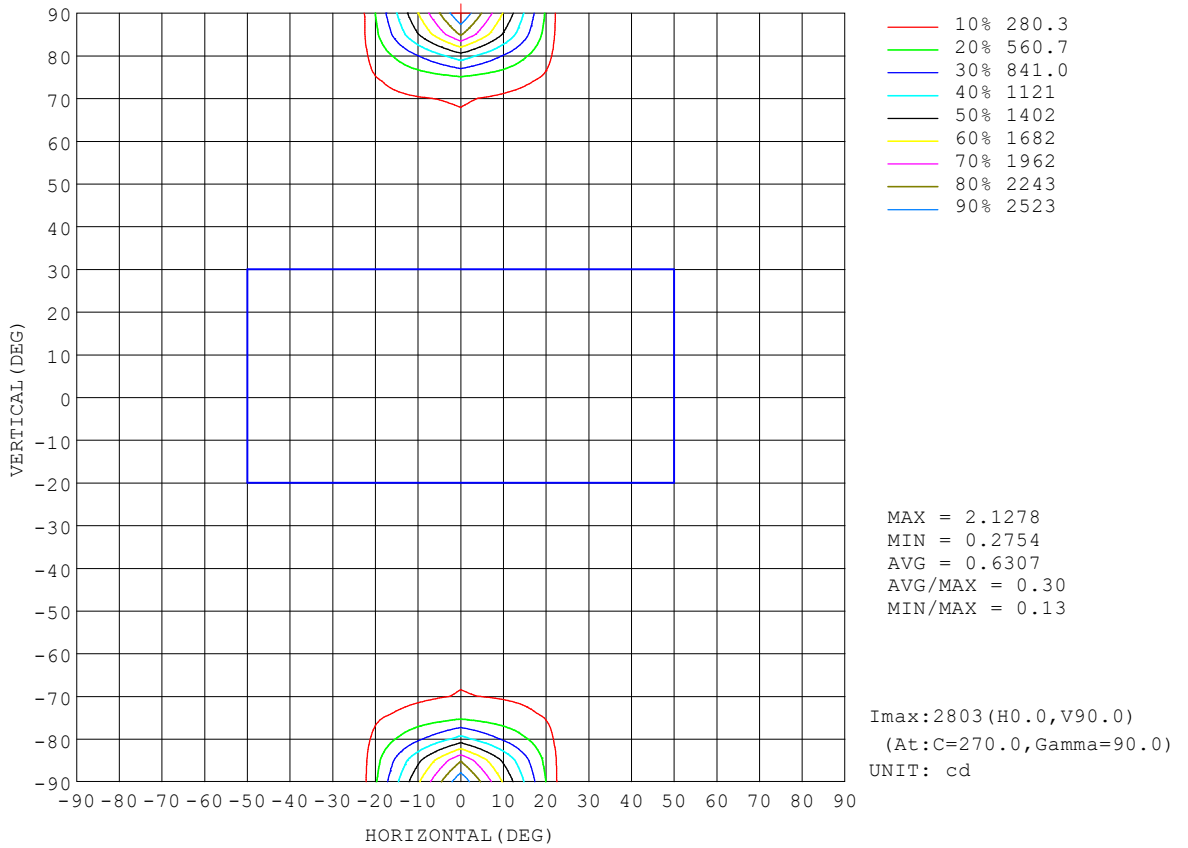


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2023-11-16

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:220.38V I:0.0774A P:9.9436W PF:0.5831 Freq:50.00Hz Lamp Flux:1005.7x1 lm		
NAME: 壁灯	TYPE: W系列	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:

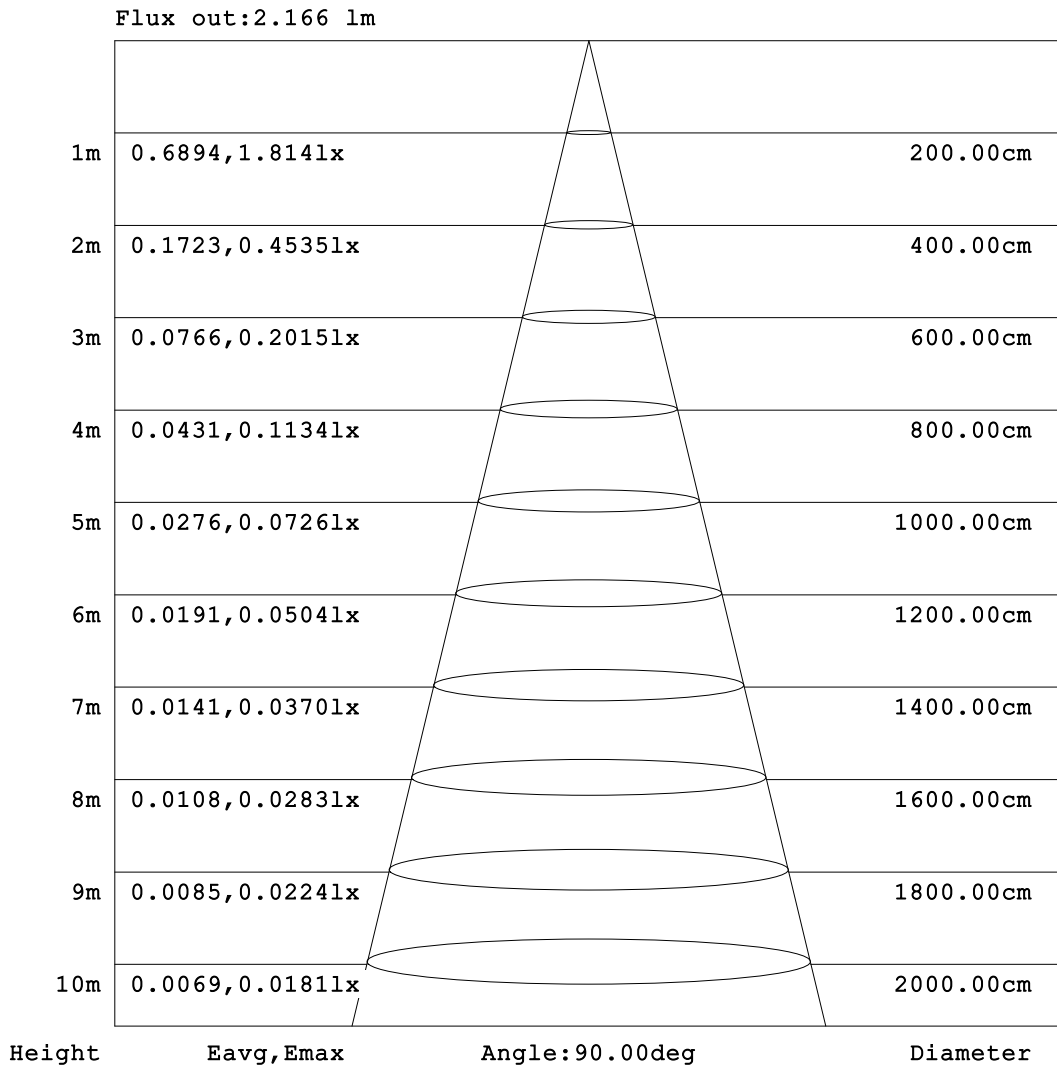


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: DAMIN  
Test Date: 2023-11-16

γ Range: 0 - 180DEG  
γ Interval: 5.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
Humidity: 65.0%  
Test Distance: 9.401m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**

Test:U:220.38V I:0.0774A P:9.9436W PF:0.5831 Freq:50.00Hz Lamp Flux:1005.7x1 lm		
NAME: 壁灯	TYPE: W系列	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:

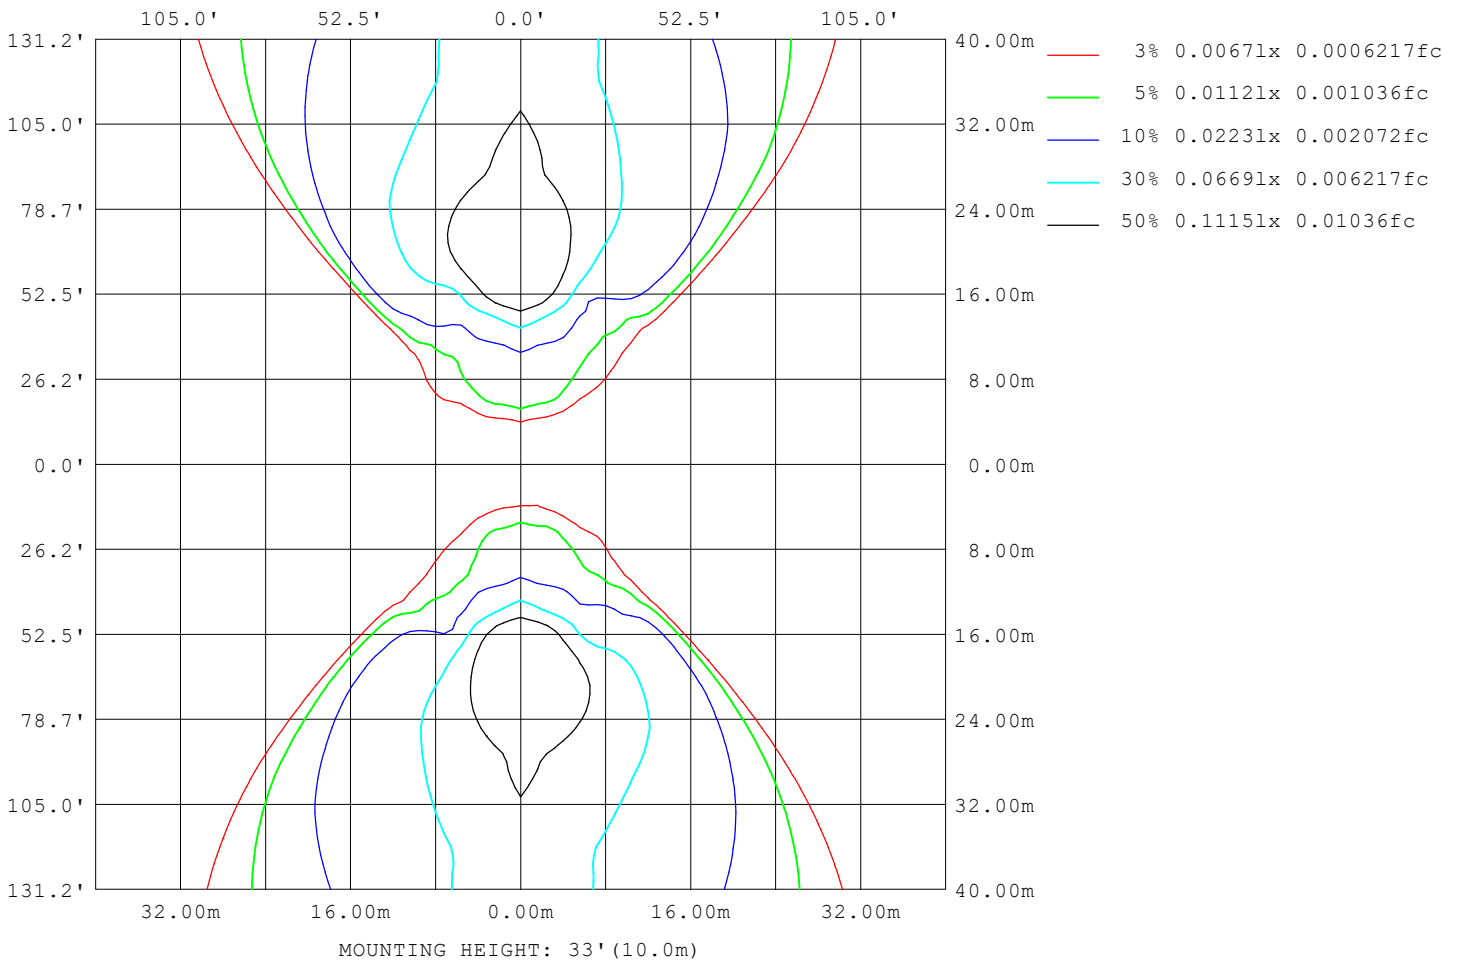

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-11-16

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 9.401m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:220.38V I:0.0774A P:9.9436W PF:0.5831 Freq:50.00Hz Lamp Flux:1005.7x1 lm		
NAME: 壁灯	TYPE: W系列	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	2
L_0~180 (75) av	3
L_0~180 (85) av	10
L_90~270 (65) av	3411
L_90~270 (75) av	12192
L_90~270 (85) av	152946
L_45 (65) av	40
L_45 (75) av	75
L_45 (85) av	237

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:DAMIN  
 Test Date:2023-11-16

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

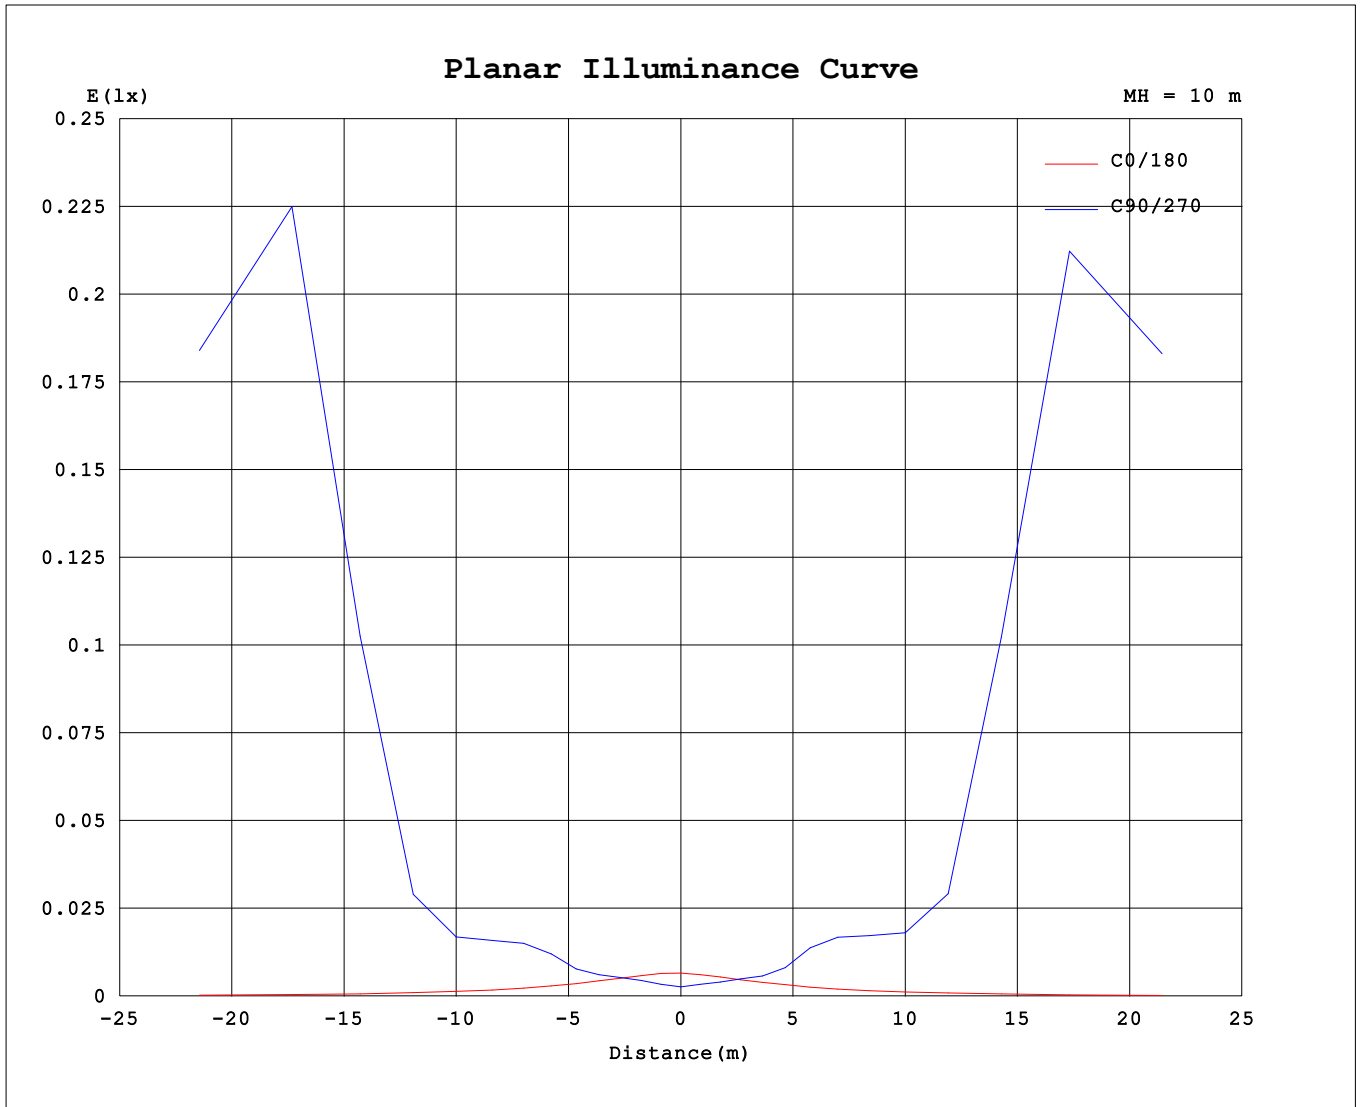

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2023-11-16

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 9.401m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.38V I:0.0774A P:9.9436W PF:0.5831 Freq:50.00Hz Lamp Flux:1005.7x1 lm		
NAME: 壁灯	TYPE: W系列	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 156.5mm	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39			
5	0.39	0.39	0.43	0.56	0.50	0.57	0.42	0.42	0.37	0.39	0.45	0.39	0.50	0.40	0.45	0.37			
10	0.37	0.39	0.50	0.72	0.69	0.74	0.51	0.46	0.34	0.41	0.51	0.49	0.62	0.51	0.51	0.34			
15	0.34	0.39	0.59	0.85	0.86	0.88	0.62	0.48	0.31	0.41	0.57	0.63	0.80	0.65	0.56	0.30			
20	0.32	0.40	0.66	1.04	1.08	1.05	0.71	0.51	0.29	0.43	0.68	0.80	1.02	0.82	0.62	0.27			
25	0.29	0.42	0.77	1.32	1.52	1.30	0.82	0.54	0.26	0.46	0.79	1.16	1.59	1.20	0.71	0.26			
30	0.27	0.42	0.94	2.07	2.71	1.97	0.94	0.56	0.24	0.51	0.95	2.07	3.09	2.08	0.86	0.26			
35	0.25	0.46	1.20	3.27	3.99	3.12	1.11	0.60	0.22	0.55	1.23	3.51	4.45	3.54	1.11	0.26			
40	0.24	0.48	1.70	4.27	5.13	4.03	1.43	0.63	0.21	0.61	1.85	4.49	5.59	4.57	1.56	0.27			
45	0.23	0.52	2.48	5.40	6.96	4.91	1.99	0.68	0.21	0.67	2.79	5.53	7.45	5.72	2.28	0.29			
50	0.23	0.55	3.07	7.29	15.9	6.47	2.63	0.72	0.21	0.75	3.43	6.85	16.0	7.62	3.02	0.30			
55	0.23	0.60	3.59	15.0	79.0	10.58	3.07	0.77	0.21	0.81	3.91	14.9	78.8	12.03	3.58	0.33			
60	0.23	0.64	4.03	46.4	261	23.6	3.38	0.82	0.21	0.87	4.18	54.4	247	25.9	3.94	0.35			
65	0.23	0.69	4.43	167	354	106	3.52	0.85	0.21	0.93	4.49	176	352	107	4.21	0.37			
70	0.23	0.73	4.87	279	431	219	3.70	0.88	0.21	0.98	4.86	285	447	221	4.42	0.39			
75	0.23	0.73	5.20	324	745	303	3.99	0.88	0.21	1.04	4.97	326	801	308	4.80	0.42			
80	0.23	0.73	5.32	353	1777	332	4.14	0.88	0.21	1.07	5.10	355	1870	337	4.87	0.42			
85	0.22	0.72	5.49	378	3219	349	4.25	0.87	0.20	1.08	5.45	383	3313	351	5.06	0.42			
90	0.21	0.72	5.39	390	3993	353	4.22	0.85	0.20	1.09	5.38	391	4072	352	4.89	0.43			
95	0.21	0.68	5.02	376	3108	345	3.90	0.80	0.20	1.06	3.35	374	3143	344	4.63	0.43			
100	0.20	0.50	3.21	138	1085	105	2.11	0.59	0.19	0.78	2.40	162	1116	132	2.27	0.39			
105	0.19	0.44	2.75	278	298	270	2.05	0.62	0.18	0.76	2.88	279	217	273	2.57	0.31			
110	0.18	0.45	3.95	36.9	38.0	35.2	2.98	0.65	0.18	0.88	3.71	30.8	36.0	26.0	3.33	0.32			
115	0.17	0.34	3.75	92.6	222	73.7	3.23	0.58	0.17	0.85	3.92	145	262	96.0	3.69	0.32			
120	0.16	0.20	2.62	11.14	27.3	10.26	2.58	0.48	0.16	0.74	2.97	14.2	38.3	10.54	2.74	0.25			
125	0.15	0.11	1.66	4.83	8.26	5.10	1.72	0.39	0.16	0.62	1.85	5.08	6.97	4.20	1.67	0.18			
130	0.15	0.04	1.06	2.89	4.47	2.84	1.12	0.32	0.14	0.50	1.16	2.63	3.66	2.51	0.93	0.14			
135	0.14	0.03	0.71	2.03	3.38	1.94	0.78	0.25	0.14	0.41	0.78	1.93	2.84	1.88	0.59	0.11			
140	0.14	0.03	0.43	1.33	1.92	1.31	0.47	0.22	0.13	0.37	0.44	1.42	1.66	1.32	0.17	0.08			
145	0.14	0.03	0.28	0.85	1.22	0.82	0.28	0.20	0.13	0.32	0.29	0.64	1.10	0.66	0.15	0.07			
150	0.14	0.03	0.15	0.47	0.72	0.38	0.18	0.17	0.11	0.28	0.13	0.39	0.45	0.48	0.08	0.05			
155	0.14	0.03	0.12	0.18	0.33	0.09	0.14	0.16	0.11	0.25	0.11	0.23	0.30	0.30	0.05	0.04			
160	0.14	0.03	0.07	0.03	0.14	0.05	0.14	0.14	0.11	0.25	0.02	0.12	0.11	0.11	0.00	0.04			
165	0.14	0.05	0.04	0.03	0.06	0.05	0.10	0.12	0.11	0.19	0.02	0.00	0.03	0.00	0.00	0.04			
170	0.14	0.10	0.04	0.03	0.06	0.09	0.10	0.11	0.11	0.18	0.02	0.06	0.07	0.04	0.00	0.04			
175	0.13	0.14	0.01	0.00	0.06	0.00	0.03	0.10	0.11	0.17	0.00	0.06	0.00	0.04	0.00	0.07			
180	0.11	0.15	0.00	0.00	0.00	0.00	0.01	0.09	0.11	0.15	0.00	0.00	0.00	0.00	0.00	0.08			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:DAMIN  
 Test Date:2023-11-16

γ Range: 0 - 180DEG  
 γ Interval: 5.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks: