
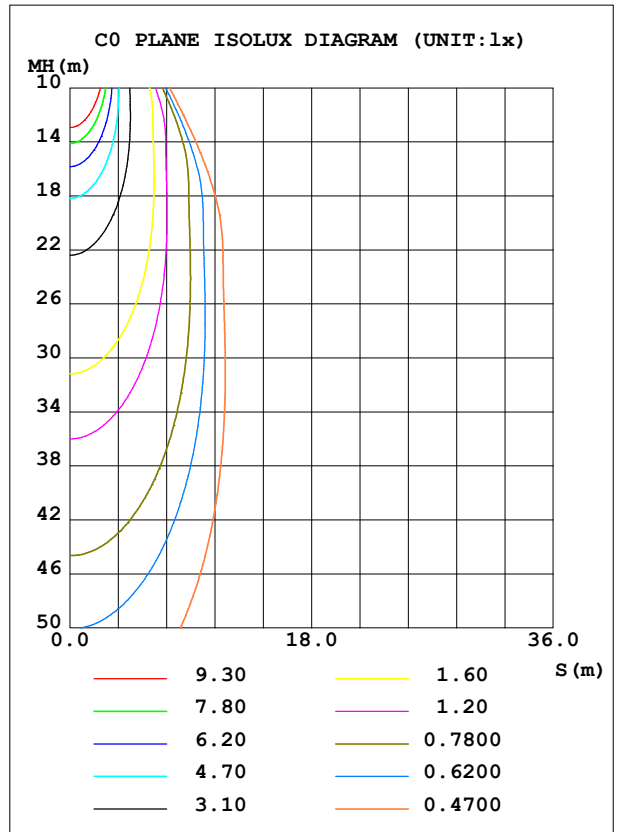


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.30V I:0.0604A P:7.2884W PF:0.5478 Freq:50.00Hz Lamp Flux:715.031x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 40mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 98.11 lm/W
MODEL	308	I _{max} (cd)	1591	S/MH (C0/180)	0.53	
NOMINAL POWER (W)	7	LOR (%)	100.0	S/MH (C90/270)	0.68	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	715.03	η UP, DN (C0-180)	0.6, 39.3	
NOMINAL FLUX (lm)	715.031	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.5, 59.6	
LAMPS INSIDE	1	η up (%)	1.1	CIBSE SHR NOM	0.50	
TEST VOLTAGE (V)	219.5	η down (%)	98.9	CIBSE SHR MAX	0.55	

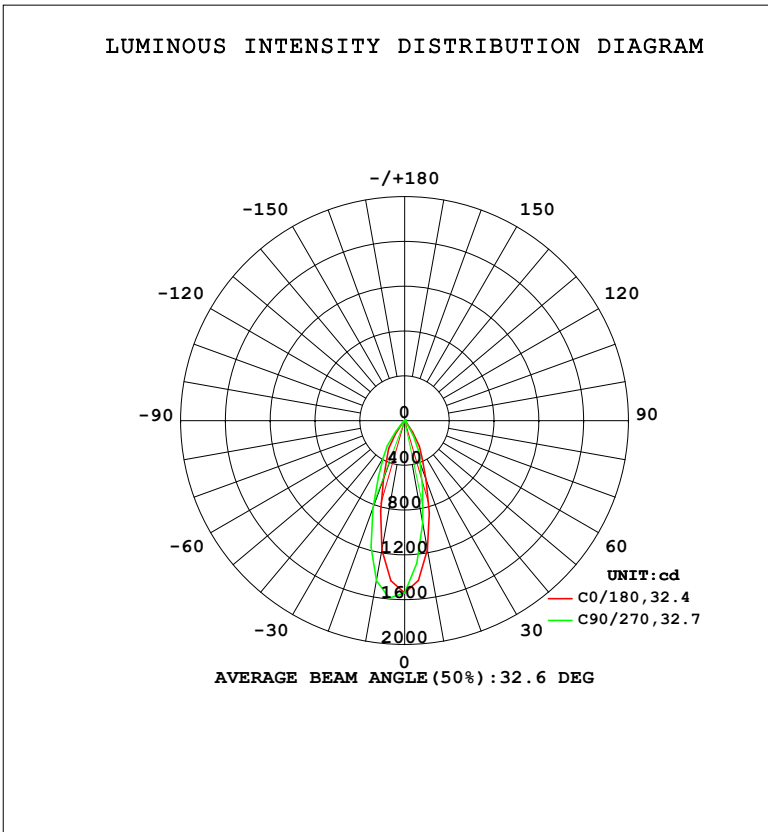

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-10

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1171	998.0	936.0	998.3	1175	1367	1452	1396	0- 10	129.4	129.4	18.1,18.1
20	566.8	446.8	406.8	437.9	556.2	724.1	834.6	761.4	10- 20	242.6	371.9	52,52
30	266.7	191.4	162.0	201.6	288.3	354.8	383.0	352.8	20- 30	190.9	562.8	78.7,78.7
40	37.32	25.07	20.26	25.10	40.50	102.0	127.5	88.71	30- 40	97.14	660.0	92.3,92.3
50	15.24	14.18	13.22	13.41	14.77	16.00	17.11	15.98	40- 50	22.55	682.5	95.5,95.5
60	9.585	8.282	7.499	7.788	8.983	11.34	12.11	11.22	50- 60	11.06	693.6	97,97
70	5.816	5.405	5.219	5.421	5.687	6.115	6.512	6.272	60- 70	7.385	701.0	98,98
80	4.125	1.818	0.5293	1.556	4.194	4.553	4.558	4.726	70- 80	5.021	706.0	98.7,98.7
90	0.0240	0.0121	0.0121	0.0122	0.0238	0.0180	0.0602	0.0242	80- 90	1.449	707.4	98.9,98.9
100	0.0119	0.0120	0.0121	0.0121	0.0478	0.0301	0.0363	0.0425	90-100	0.0288	707.5	98.9,98.9
110	0.0951	0.1620	0.1929	0.1392	0.1910	0.1205	0.0968	0.1336	100-110	0.0734	707.5	99,99
120	0.4283	0.5943	0.6696	0.5510	0.6082	0.4512	0.3930	0.4370	110-120	0.3036	707.8	99,99
130	1.149	1.465	1.593	1.399	1.455	1.143	1.022	1.123	120-130	0.7746	708.6	99.1,99.1
140	2.268	2.649	2.776	2.563	2.670	2.291	2.139	2.257	130-140	1.426	710.0	99.3,99.3
150	3.359	3.611	3.695	3.497	3.712	3.457	3.329	3.414	140-150	1.874	711.9	99.6,99.6
160	3.788	3.828	3.877	3.734	3.884	3.882	3.919	3.928	150-160	1.722	713.6	99.8,99.8
170	3.634	3.576	3.557	3.534	3.544	3.630	3.731	3.746	160-170	1.067	714.7	100,100
180	3.485	3.510	3.478	3.564	3.449	3.510	3.521	3.583	170-180	0.3405	715.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 674.91 lm

%lum = 94.4%

%lamp = 94.4%

Conical surface Flux(130deg): 697.65 lm

%lum = 97.6%


%lamp = 97.6%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-10

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.30V I:0.0604A P:7.2884W PF:0.5478 Freq:50.00Hz Lamp Flux:715.031x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 40mm	Shielding Angle:

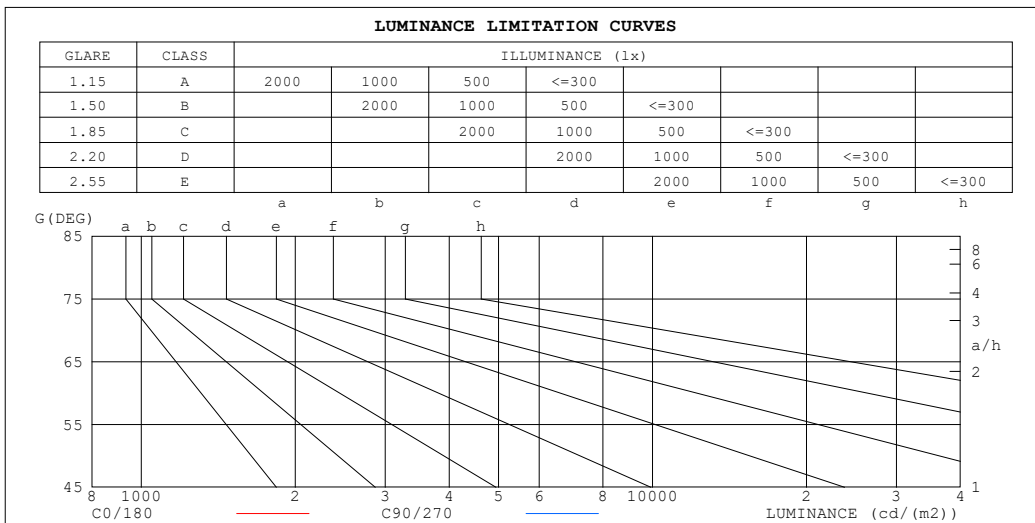

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	30	7
80	400	51
75	334	279
70	286	254
65	282	234
60	323	249
55	368	299
50	399	342
45	452	358


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-10

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.30V I:0.0604A P:7.2884W PF:0.5478 Freq:50.00Hz Lamp Flux:715.031x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 40mm	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
	ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.04	1.03	1.01	1.00	.99	.98	.97	.96	.95	.93
2.0	1.04	.97	.97	1.02	.98	.95	.98	.96	.93	.95	.93	.91	.92	.91	.89	.87
3.0	.97	.93	.89	.96	.92	.88	.93	.90	.87	.91	.88	.85	.88	.86	.84	.82
4.0	.92	.87	.83	.91	.86	.82	.88	.84	.81	.86	.83	.80	.84	.81	.79	.78
5.0	.87	.81	.77	.86	.81	.77	.84	.80	.76	.82	.78	.76	.81	.77	.75	.73
6.0	.82	.77	.73	.81	.76	.73	.80	.75	.72	.78	.74	.71	.77	.74	.71	.70
7.0	.78	.73	.69	.77	.72	.69	.76	.72	.68	.75	.71	.68	.74	.70	.67	.66
8.0	.74	.69	.65	.74	.69	.65	.73	.68	.65	.72	.68	.64	.71	.67	.64	.63
9.0	.71	.66	.62	.71	.65	.62	.70	.65	.62	.69	.64	.61	.68	.64	.61	.60
10.0	.68	.63	.59	.68	.62	.59	.67	.62	.59	.66	.62	.59	.65	.61	.59	.57

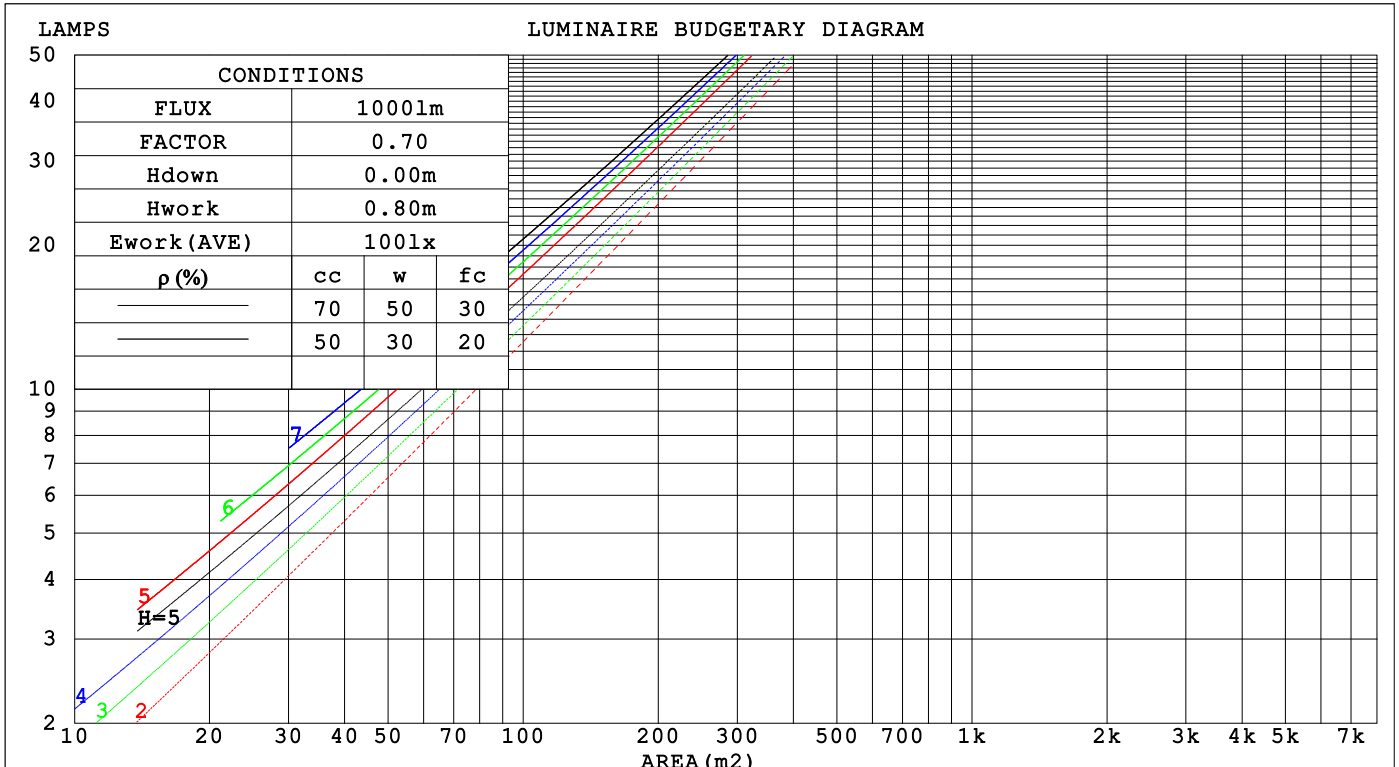

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-10

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.30V I:0.0604A P:7.2884W PF:0.5478 Freq:50.00Hz								
Lamp Flux:715.031x1 lm								
NAME: 射灯			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.: 40mm			Shielding Angle:		

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.172	.098	.031	.165	.094	.030	.152	.087	.028	.140	.081	.026	.129	.075	.024	
2.0	.162	.089	.027	.156	.086	.027	.145	.081	.025	.135	.076	.024	.126	.071	.022	
3.0	.153	.081	.024	.148	.079	.024	.138	.075	.023	.130	.071	.022	.122	.067	.021	
4.0	.144	.075	.022	.140	.073	.022	.132	.070	.021	.124	.067	.020	.117	.064	.019	
5.0	.137	.070	.020	.133	.068	.020	.126	.066	.019	.119	.063	.019	.113	.060	.018	
6.0	.130	.065	.019	.126	.064	.018	.120	.062	.018	.114	.059	.017	.109	.057	.017	
7.0	.124	.061	.017	.121	.060	.017	.115	.058	.017	.110	.056	.016	.105	.055	.016	
8.0	.118	.058	.016	.115	.057	.016	.110	.055	.016	.106	.054	.015	.101	.052	.015	
9.0	.113	.054	.015	.110	.054	.015	.106	.052	.015	.102	.051	.015	.098	.050	.014	
10.0	.108	.052	.014	.106	.051	.014	.102	.050	.014	.098	.049	.014	.095	.048	.014	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0																
1.0	.199	.199	.199	.170	.170	.170	.116	.116	.116	.067	.067	.067	.021	.021	.021	
2.0	.163	.141	.122	.140	.121	.105	.096	.084	.073	.055	.049	.043	.018	.016	.014	
3.0	.150	.122	.099	.129	.105	.086	.088	.073	.060	.051	.043	.036	.016	.014	.012	
4.0	.139	.107	.082	.120	.092	.071	.082	.064	.050	.048	.038	.030	.015	.012	.010	
5.0	.130	.095	.069	.112	.082	.060	.077	.058	.043	.045	.034	.025	.014	.011	.008	
6.0	.122	.086	.060	.105	.074	.052	.072	.052	.037	.042	.031	.022	.014	.010	.007	
7.0	.115	.078	.052	.099	.068	.045	.069	.047	.032	.040	.028	.019	.013	.009	.006	
8.0	.109	.072	.046	.094	.062	.040	.065	.044	.028	.038	.026	.017	.012	.008	.006	
9.0	.104	.066	.041	.090	.058	.036	.062	.040	.025	.036	.024	.015	.012	.008	.005	
10.0	.099	.062	.037	.086	.054	.032	.059	.038	.023	.035	.022	.014	.011	.007	.005	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-10

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.30V I:0.0604A P:7.2884W PF:0.5478 Freq:50.00Hz Lamp Flux:715.03lx1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 40mm	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	4.8	5.7	5.1	5.9	6.1	2.1	2.9	2.3	3.1	3.3
3H	5.4	6.2	5.7	6.4	6.7	3.4	4.2	3.7	4.4	4.7
4H	6.0	6.8	6.3	7.0	7.2	4.1	4.9	4.4	5.1	5.3
6H	6.7	7.4	7.0	7.7	7.9	4.0	4.8	4.4	5.0	5.3
8H	6.7	7.3	7.0	7.6	7.9	4.0	4.7	4.3	5.0	5.2
12H	6.6	7.3	6.9	7.5	7.8	3.9	4.6	4.3	4.9	5.2
4H 2H	4.9	5.6	5.2	5.9	6.1	2.5	3.2	2.7	3.4	3.7
3H	5.8	6.4	6.1	6.7	7.0	4.2	4.9	4.6	5.2	5.5
4H	6.6	7.2	6.9	7.5	7.8	4.9	5.5	5.3	5.8	6.1
6H	7.4	7.9	7.8	8.3	8.6	4.9	5.4	5.2	5.7	6.1
8H	7.3	7.8	7.7	8.2	8.6	4.8	5.3	5.2	5.7	6.1
12H	7.3	7.7	7.7	8.1	8.5	4.7	5.2	5.2	5.6	6.0
8H 4H	6.7	7.2	7.1	7.6	8.0	5.1	5.6	5.5	6.0	6.4
6H	7.5	7.9	8.0	8.3	8.8	5.1	5.5	5.6	5.9	6.4
8H	7.5	7.8	7.9	8.3	8.7	5.1	5.4	5.5	5.8	6.3
12H	7.4	7.7	7.9	8.2	8.7	5.0	5.3	5.5	5.8	6.3
12H 4H	6.7	7.1	7.1	7.5	7.9	5.1	5.6	5.5	6.0	6.4
6H	7.5	7.8	7.9	8.3	8.7	5.1	5.5	5.6	5.9	6.4
8H	7.4	7.7	7.9	8.2	8.7	5.0	5.3	5.5	5.8	6.3

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.7 / - 0.6	+ 0.4 / - 0.7
1.5H	+ 1.3 / - 0.6	+ 0.8 / - 0.9
2.0H	+ 0.5 / - 0.6	+ 1.1 / - 2.3

CIE Pub.117, 715.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -1.2)
Area: 0.06 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:DAMIN
Test Date:2023-11-10

γ Range: 0 - 180DEG
γ Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
Humidity:65.0%
Test Distance:9.401m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.30V I:0.0604A P:7.2884W PF:0.5478 Freq:50.00Hz Lamp Flux:715.031x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 40mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	87	80	77	86	80	77	85	80	76	73
0.80	94	88	84	93	88	84	92	87	84	80
1.00	99	93	89	98	92	89	96	92	88	84
1.25	102	97	94	101	97	93	99	95	92	88
1.50	105	100	97	104	100	96	101	98	95	90
2.00	108	104	100	106	102	99	103	100	98	92
2.50	110	106	103	108	104	102	105	102	100	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	107	105	104	96
5.00	115	112	110	112	110	109	108	107	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-10

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.30V I:0.0604A P:7.2884W PF:0.5478 Freq:50.00Hz Lamp Flux:715.031x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 40mm	Shielding Angle:

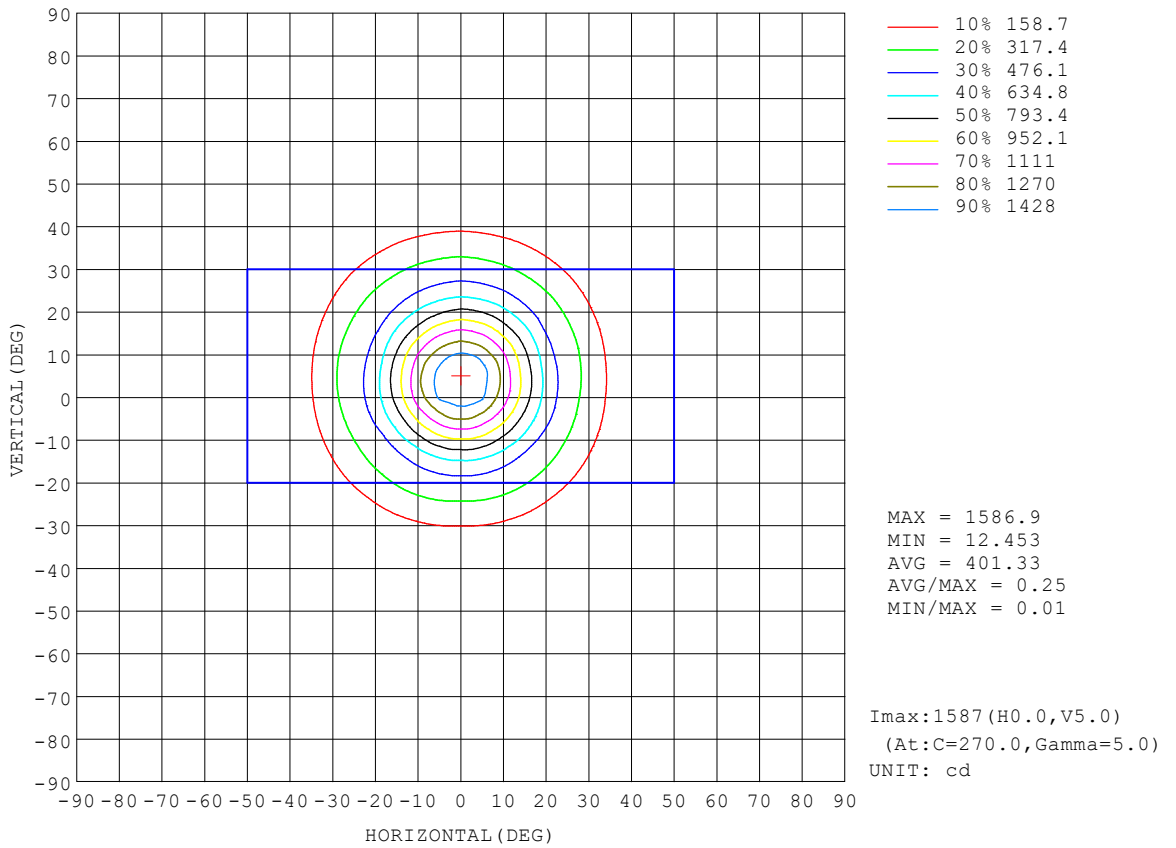


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-10

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.30V I:0.0604A P:7.2884W PF:0.5478 Freq:50.00Hz Lamp Flux:715.031x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 40mm	Shielding Angle:

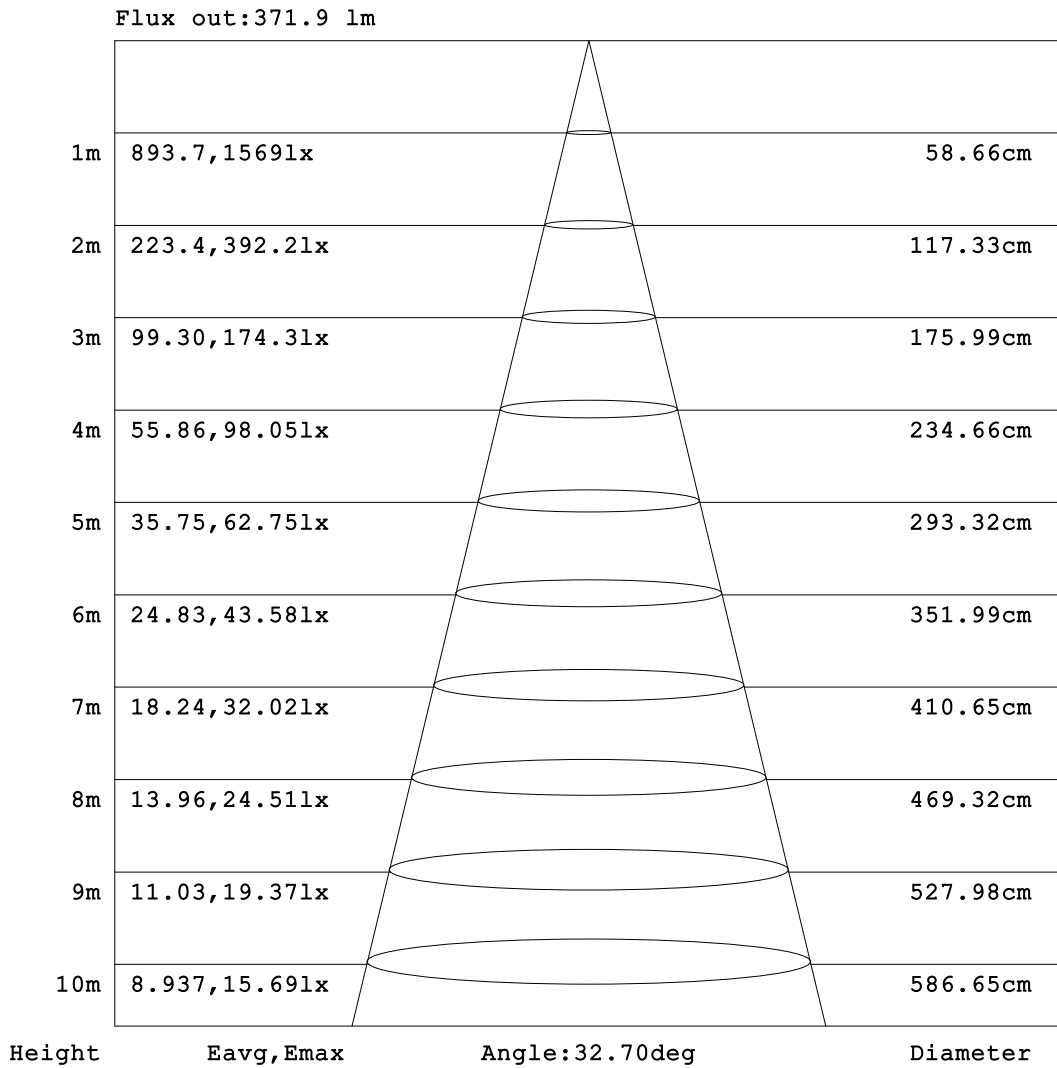


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-10

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:220.30V I:0.0604A P:7.2884W PF:0.5478 Freq:50.00Hz Lamp Flux:715.031x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 40mm	Shielding Angle:

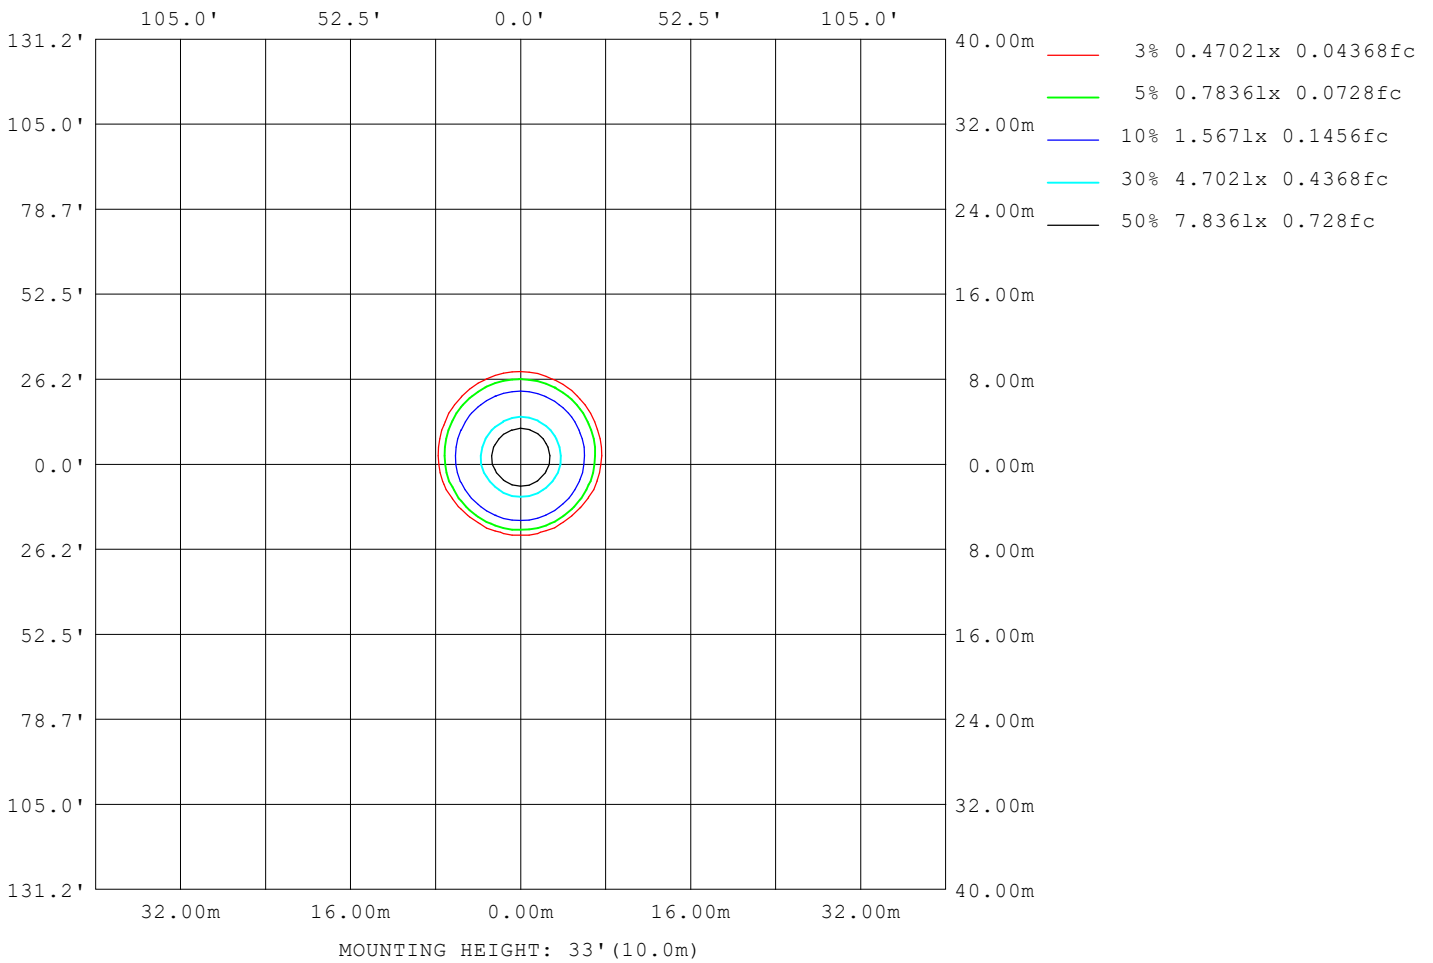

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-10

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:220.30V I:0.0604A P:7.2884W PF:0.5478 Freq:50.00Hz Lamp Flux:715.031x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 40mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	274
L_0~180 (75) av	328
L_0~180 (85) av	24
L_90~270 (65) av	294
L_90~270 (75) av	309
L_90~270 (85) av	302
L_45 (65) av	285
L_45 (75) av	320
L_45 (85) av	232

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2023-11-10

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

Planar Illuminance Curve

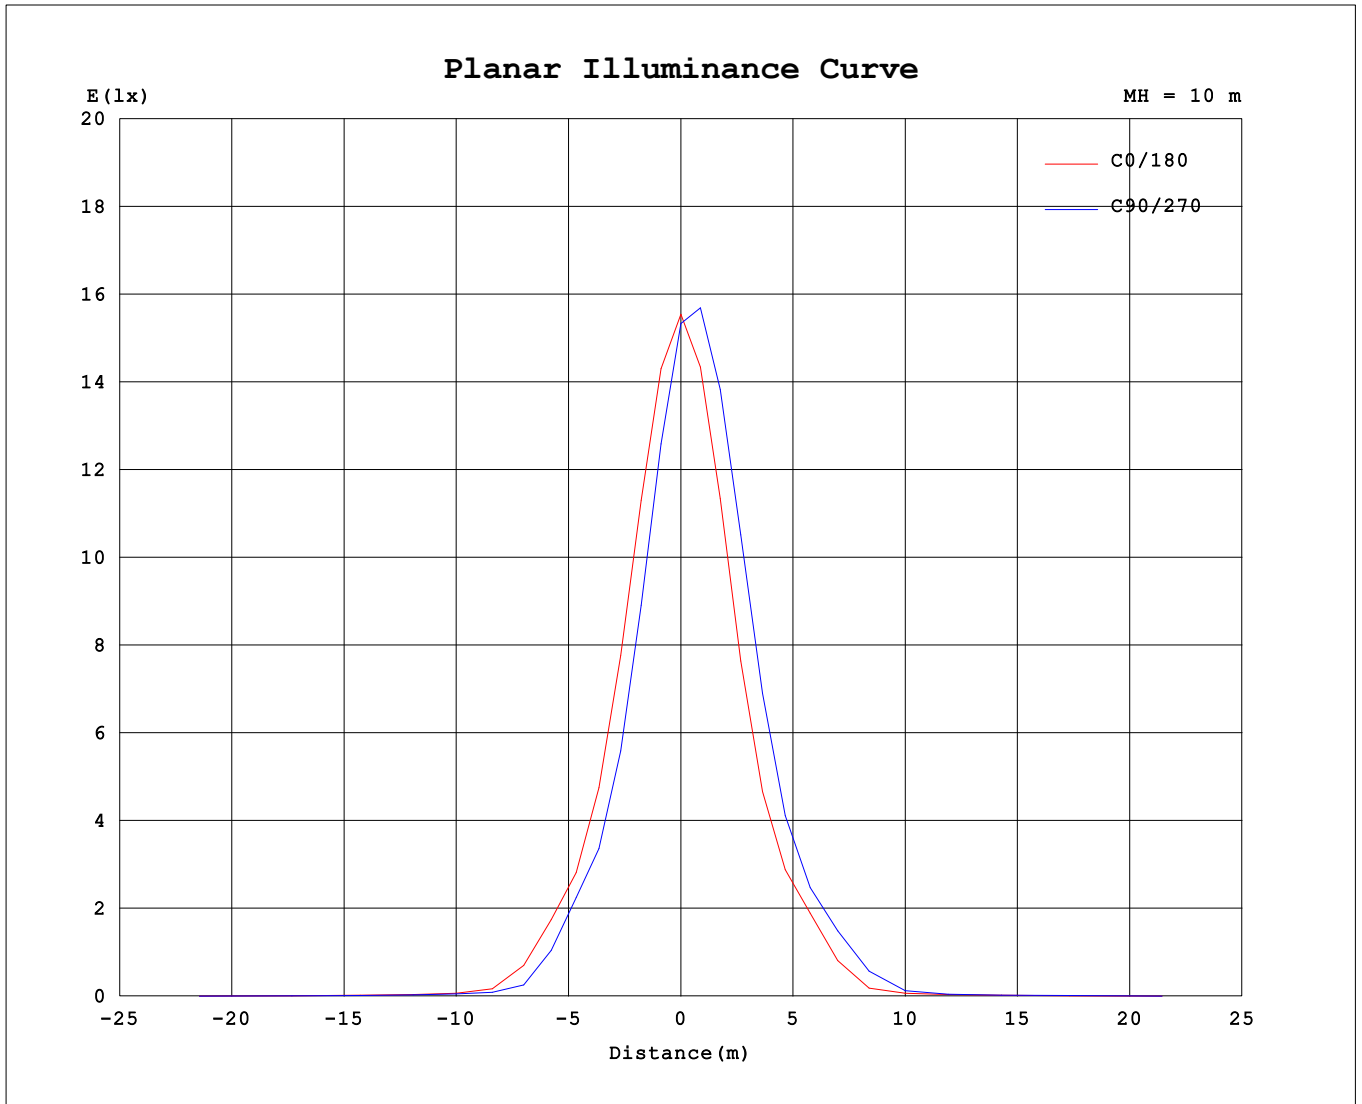

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2023-11-10

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.30V I:0.0604A P:7.2884W PF:0.5478 Freq:50.00Hz Lamp Flux:715.031x1 lm		
NAME: 射灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.: 40mm	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	1538	1538	1538	1538	1538	1538	1538	1538	1538	1538	1538	1538	1538	1538	1538	1538			
5	1432	1372	1318	1292	1278	1294	1326	1381	1435	1491	1541	1571	1591	1588	1567	1504			
10	1171	1076	998	959	936	953	998	1080	1175	1275	1367	1415	1452	1439	1396	1284			
15	853	761	683	643	623	636	670	744	839	945	1060	1126	1170	1145	1084	966			
20	567	499	447	420	407	416	438	489	556	634	724	789	835	816	761	658			
25	375	348	326	312	303	316	333	356	383	423	482	524	555	539	499	428			
30	267	227	191	174	162	177	202	246	288	325	355	371	383	370	353	315			
35	127	93.4	64.5	52.6	46.6	53.9	68.9	104	147	194	240	263	273	257	227	178			
40	37.3	31.4	25.1	21.8	20.3	21.7	25.1	32.2	40.5	65.9	102	122	128	114	88.7	54.9			
45	19.0	16.6	16.0	15.4	15.2	15.2	15.7	16.3	18.4	23.6	31.4	35.0	35.9	33.6	30.5	24.0			
50	15.2	14.8	14.2	13.6	13.2	13.1	13.4	14.2	14.8	15.5	16.0	16.5	17.1	16.6	16.0	15.7			
55	12.5	12.0	11.3	10.8	10.3	10.2	10.4	11.1	12.0	13.1	14.2	14.6	14.6	14.5	14.1	13.3			
60	9.58	8.86	8.28	7.91	7.50	7.51	7.79	8.32	8.98	10.1	11.3	12.0	12.1	11.8	11.2	10.4			
65	7.08	6.69	6.38	6.12	5.95	5.97	6.22	6.53	6.83	7.37	8.14	8.73	8.99	8.67	8.20	7.63			
70	5.82	5.59	5.40	5.23	5.22	5.20	5.42	5.56	5.69	5.85	6.12	6.44	6.51	6.43	6.27	6.06			
75	5.13	4.79	4.58	4.39	4.34	4.43	4.72	4.97	5.07	5.18	5.19	5.28	5.25	5.36	5.37	5.34			
80	4.12	3.28	1.82	0.97	0.53	0.82	1.56	3.11	4.19	4.52	4.55	4.59	4.56	4.69	4.73	4.60			
85	0.16	0.05	0.08	0.01	0.04	0.01	0.06	0.04	0.09	0.89	2.18	2.72	3.12	2.99	2.53	1.06			
90	0.02	0.01	0.01	0.02	0.01	0.02	0.01	0.01	0.02	0.04	0.02	0.10	0.06	0.12	0.02	0.04			
95	0.01	0.02	0.01	0.04	0.01	0.04	0.01	0.02	0.04	0.02	0.02	0.02	0.02	0.02	0.03	0.01			
100	0.01	0.04	0.01	0.05	0.01	0.05	0.01	0.04	0.05	0.02	0.03	0.02	0.04	0.02	0.04	0.01			
105	0.01	0.08	0.04	0.13	0.07	0.11	0.03	0.07	0.10	0.02	0.06	0.02	0.05	0.02	0.06	0.01			
110	0.10	0.19	0.16	0.25	0.19	0.23	0.14	0.16	0.19	0.09	0.12	0.05	0.10	0.05	0.13	0.09			
115	0.22	0.34	0.34	0.44	0.39	0.42	0.30	0.31	0.36	0.23	0.25	0.16	0.22	0.16	0.25	0.23			
120	0.43	0.57	0.59	0.71	0.67	0.69	0.55	0.52	0.61	0.45	0.45	0.35	0.39	0.34	0.44	0.45			
125	0.73	0.92	0.97	1.09	1.07	1.07	0.91	0.84	0.97	0.77	0.73	0.61	0.65	0.60	0.72	0.76			
130	1.15	1.38	1.47	1.61	1.59	1.58	1.40	1.29	1.45	1.22	1.14	1.00	1.02	0.98	1.12	1.18			
135	1.68	1.94	2.05	2.20	2.18	2.17	1.97	1.84	2.06	1.79	1.68	1.52	1.53	1.49	1.64	1.74			
140	2.27	2.53	2.65	2.80	2.78	2.75	2.56	2.42	2.67	2.40	2.29	2.13	2.14	2.10	2.26	2.35			
145	2.86	3.11	3.20	3.34	3.31	3.27	3.11	2.98	3.25	3.01	2.91	2.75	2.76	2.71	2.87	2.97			
150	3.36	3.57	3.61	3.74	3.70	3.66	3.50	3.44	3.71	3.50	3.46	3.30	3.33	3.27	3.41	3.47			
155	3.69	3.82	3.80	3.86	3.88	3.78	3.71	3.72	3.92	3.81	3.82	3.71	3.76	3.69	3.80	3.81			
160	3.79	3.80	3.83	3.81	3.88	3.75	3.73	3.71	3.88	3.87	3.88	3.87	3.92	3.91	3.93	3.92			
165	3.78	3.70	3.73	3.72	3.74	3.63	3.65	3.60	3.73	3.79	3.79	3.89	3.90	3.95	3.87	3.90			
170	3.63	3.54	3.58	3.53	3.56	3.45	3.53	3.52	3.54	3.66	3.63	3.72	3.73	3.84	3.75	3.77			
175	3.50	3.48	3.52	3.50	3.45	3.47	3.50	3.51	3.45	3.52	3.54	3.58	3.56	3.69	3.66	3.66			
180	3.48	3.48	3.51	3.51	3.48	3.50	3.56	3.57	3.45	3.47	3.51	3.51	3.52	3.57	3.58	3.58			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:DAMIN
 Test Date:2023-11-10

γ Range: 0 - 180DEG
 γ Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks: