
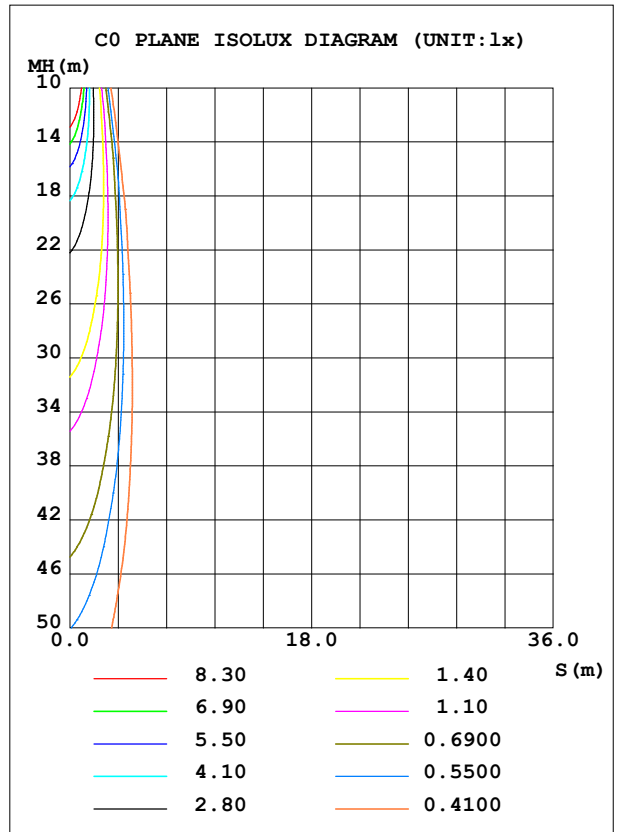


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.38V I:0.0235A P:2.5537W PF:0.4715 Freq:50.00Hz Lamp Flux:125.262x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 49.05 lm/W
MODEL	352	I _{max} (cd)	1469	S/MH (C0/180)	0.31	
NOMINAL POWER (W)	2	LOR (%)	100.0	S/MH (C90/270)	0.30	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	125.26	η UP, DN (C0-180)	0.0, 41.8	
NOMINAL FLUX (lm)	125.262	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 58.2	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	100.0	CIBSE SHR MAX	0.25	

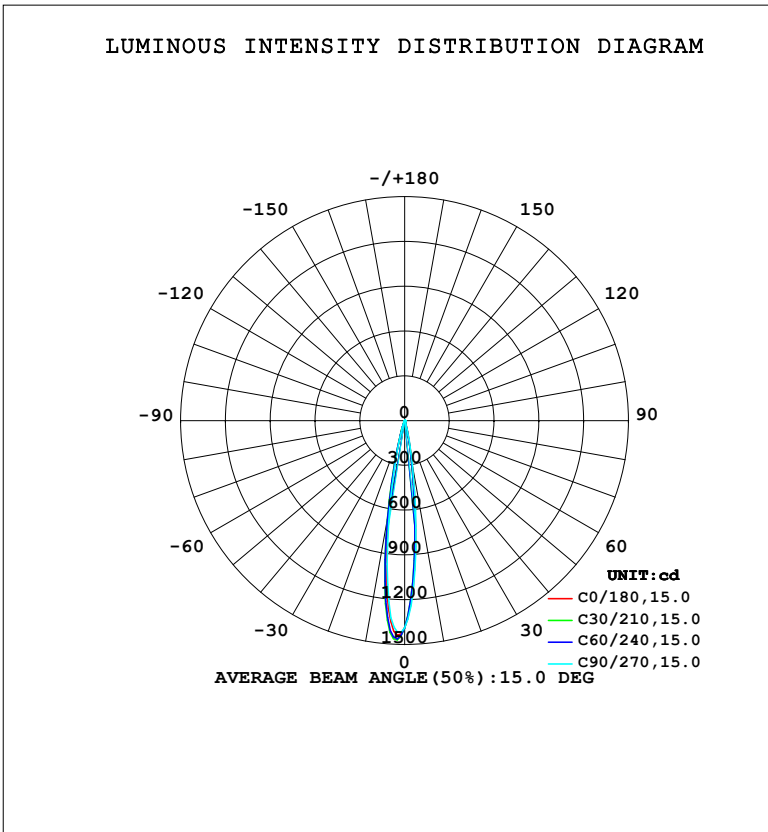

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-11-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	283.4	257.3	296.9	433.8	601.5	657.5	556.9	369.2	0- 10	78.93	78.93	63,63
20	21.08	19.77	24.29	32.48	50.11	46.27	42.14	27.01	10- 20	38.69	117.6	93.9,93.9
30	3.382	3.173	3.721	4.658	6.276	6.687	5.758	3.755	20- 30	5.860	123.5	98.6,98.6
40	0.7821	0.6234	0.8686	0.9627	1.033	1.486	1.237	0.7845	30- 40	1.437	124.9	99.7,99.7
50	0.1334	0.0659	0.1446	0.0963	0.1327	0.2043	0.1261	0.1509	40- 50	0.2952	125.2	100,100
60	0.0001	0	0	0	0	0.0181	0	0.0001	50- 60	0.0433	125.3	100,100
70	0	0	0	0	0	0	0	0	60- 70	0.0003	125.3	100,100
80	0	0	0	0	0	0	0	0	70- 80	0	125.3	100,100
90	0	0	0	0	0	0	0	0	80- 90	0	125.3	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 125.14 lm

%lum = 99.9%

%lamp = 99.9%

Conical surface Flux(130deg): 125.26 lm

%lum = 100.0%


%lamp = 100.0%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.38V I:0.0235A P:2.5537W PF:0.4715 Freq:50.00Hz Lamp Flux:125.262x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

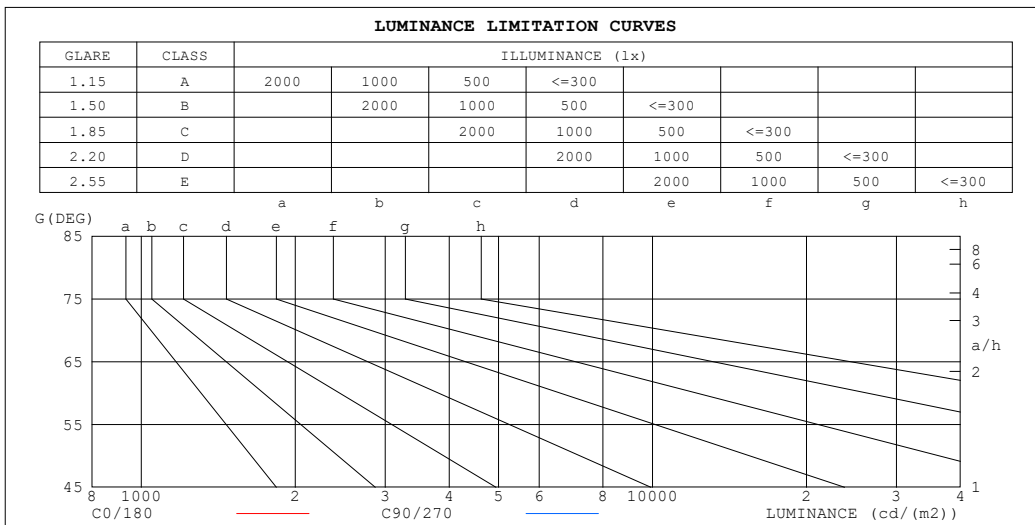

LUMINANCE cd/ (m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	0	0
75	0	0
70	0	0
65	0	0
60	0	0
55	1	1
50	2	2
45	4	4


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.38V I:0.0235A P:2.5537W PF:0.4715 Freq:50.00Hz Lamp Flux:125.262x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.14	1.12	1.11	1.12	1.11	1.09	1.08	1.07	1.06	1.04	1.04	1.03	1.01	1.00	.00	.98
2.0	1.10	1.08	1.06	1.08	1.06	1.04	1.05	1.04	1.02	1.03	1.01	1.00	.00	.99	.98	.97
3.0	1.07	1.04	1.01	1.05	1.03	1.01	1.03	1.01	.99	1.01	.99	.98	.99	.97	.96	.95
4.0	1.04	1.01	.98	1.03	1.00	.98	1.01	.99	.97	.99	.97	.96	.98	.96	.95	.94
5.0	1.01	.98	.96	1.01	.98	.95	.99	.97	.95	.98	.96	.94	.96	.95	.93	.92
6.0	.99	.96	.94	.99	.96	.93	.97	.95	.93	.96	.94	.92	.95	.93	.92	.91
7.0	.97	.94	.92	.97	.94	.92	.96	.93	.91	.95	.93	.91	.94	.92	.91	.90
8.0	.96	.93	.90	.95	.92	.90	.94	.92	.90	.94	.91	.90	.93	.91	.89	.89
9.0	.94	.91	.89	.94	.91	.89	.93	.90	.89	.92	.90	.88	.92	.90	.88	.87
10.0	.93	.90	.88	.92	.89	.88	.92	.89	.87	.91	.89	.87	.91	.89	.87	.86

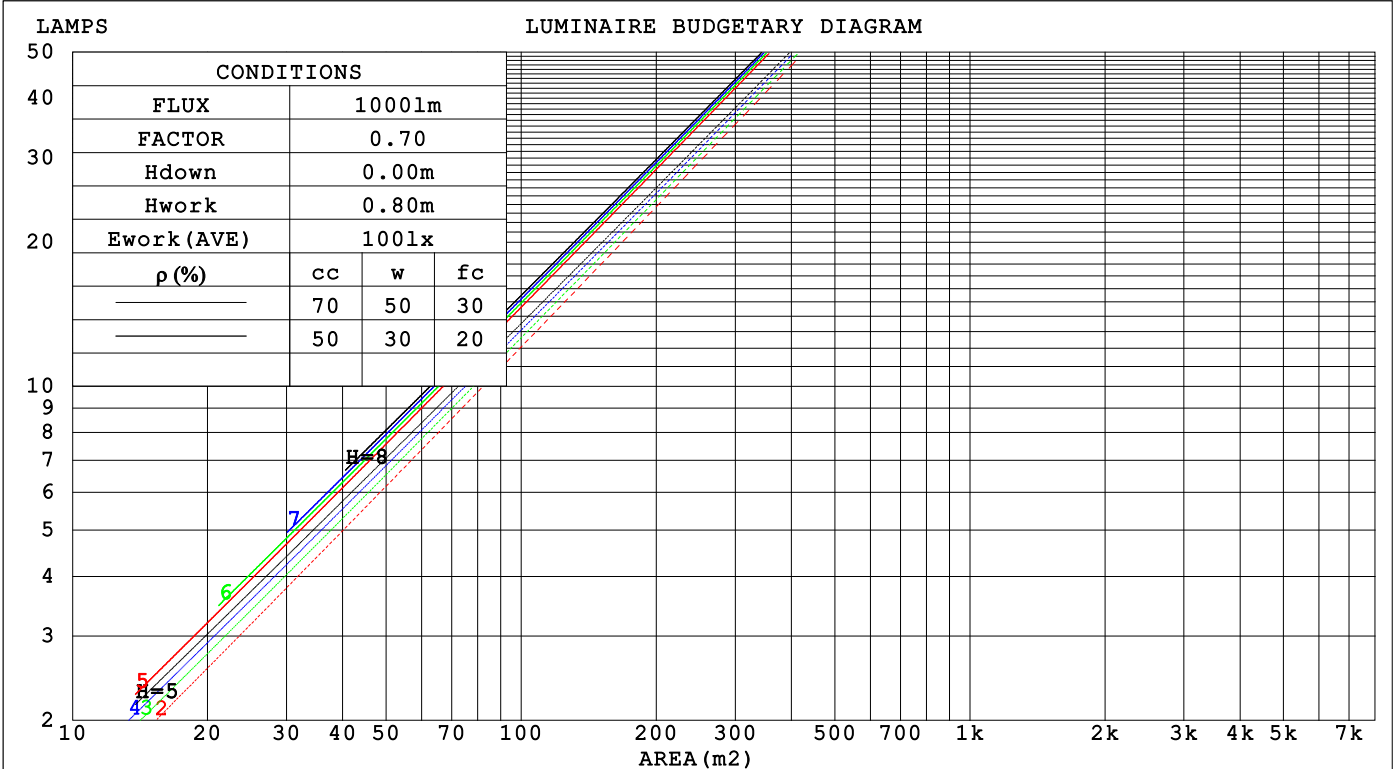

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:230.38V I:0.0235A P:2.5537W PF:0.4715 Freq:50.00Hz								
Lamp Flux:125.262x1 lm								
NAME:			TYPE:			WEIGHT:		
SPEC.: 3000K			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.:			Shielding Angle:		

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.114	.065	.021	.108	.061	.020	.096	.055	.017	.084	.049	.016	.074	.043	.014	
2.0	.104	.057	.017	.098	.054	.017	.088	.049	.015	.079	.044	.014	.071	.040	.013	
3.0	.095	.050	.015	.090	.048	.015	.082	.045	.014	.075	.041	.013	.068	.037	.012	
4.0	.087	.045	.013	.084	.044	.013	.077	.041	.012	.071	.038	.011	.065	.035	.011	
5.0	.081	.041	.012	.078	.040	.012	.072	.038	.011	.067	.035	.011	.062	.033	.010	
6.0	.076	.038	.011	.073	.037	.011	.068	.035	.010	.064	.033	.010	.060	.031	.009	
7.0	.071	.035	.010	.069	.034	.010	.065	.033	.009	.061	.031	.009	.057	.030	.009	
8.0	.067	.033	.009	.065	.032	.009	.062	.031	.009	.058	.030	.009	.055	.028	.008	
9.0	.064	.031	.009	.062	.030	.008	.059	.029	.008	.056	.028	.008	.053	.027	.008	
10.0	.061	.029	.008	.059	.029	.008	.056	.028	.008	.054	.027	.008	.051	.026	.007	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.167	.158	.150	.143	.135	.129	.098	.093	.089	.056	.054	.052	.018	.017	.017	
2.0	.147	.133	.121	.126	.114	.104	.086	.079	.073	.050	.046	.043	.016	.015	.014	
3.0	.131	.113	.099	.112	.098	.086	.077	.068	.060	.044	.040	.036	.014	.013	.012	
4.0	.117	.097	.082	.100	.084	.072	.069	.059	.050	.040	.034	.030	.013	.011	.010	
5.0	.105	.085	.069	.091	.073	.060	.062	.051	.043	.036	.030	.025	.012	.010	.008	
6.0	.096	.074	.059	.082	.064	.051	.057	.045	.036	.033	.026	.022	.011	.009	.007	
7.0	.087	.066	.051	.075	.057	.044	.052	.040	.031	.030	.024	.019	.010	.008	.006	
8.0	.080	.059	.044	.069	.051	.038	.048	.036	.027	.028	.021	.016	.009	.007	.005	
9.0	.074	.053	.038	.064	.046	.033	.044	.032	.024	.026	.019	.014	.008	.006	.005	
10.0	.069	.048	.034	.059	.041	.029	.041	.029	.021	.024	.017	.012	.008	.006	.004	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.38V I:0.0235A P:2.5537W PF:0.4715 Freq:50.00Hz										
Lamp Flux:125.262x1 lm										
NAME:			TYPE:				WEIGHT:			
SPEC.: 3000K			DIM.:				SERIAL No.:			
MFR.: EVERFINE			SUR.:				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-13.8	-13.3	-13.6	-13.2	-13.1	-14.2	-13.7	-14.0	-13.6	-13.4
3H	-14.0	-13.5	-13.7	-13.3	-13.2	-14.4	-13.9	-14.1	-13.7	-13.5
4H	-14.0	-13.6	-13.8	-13.4	-13.2	-14.4	-14.0	-14.2	-13.8	-13.6
6H	-14.1	-13.7	-13.9	-13.5	-13.2	-14.5	-14.1	-14.2	-13.9	-13.6
8H	-14.2	-13.8	-13.9	-13.5	-13.3	-14.6	-14.1	-14.3	-13.9	-13.7
12H	-14.2	-13.8	-13.9	-13.6	-13.3	-14.6	-14.2	-14.3	-13.9	-13.7
4H 2H	-14.0	-13.6	-13.8	-13.4	-13.2	-14.4	-14.0	-14.2	-13.8	-13.6
3H	-14.2	-13.8	-13.9	-13.6	-13.3	-14.6	-14.2	-14.3	-13.9	-13.7
4H	-14.3	-13.9	-14.0	-13.7	-13.4	-14.7	-14.3	-14.4	-14.0	-13.7
6H	-14.4	-14.1	-14.1	-13.8	-13.4	-14.8	-14.5	-14.4	-14.1	-13.8
8H	-14.5	-14.2	-14.1	-13.8	-13.5	-14.9	-14.5	-14.5	-14.2	-13.8
12H	-14.5	-14.2	-14.1	-13.9	-13.5	-14.9	-14.6	-14.5	-14.3	-13.9
8H 4H	-14.5	-14.2	-14.1	-13.8	-13.5	-14.9	-14.5	-14.5	-14.2	-13.8
6H	-14.6	-14.3	-14.2	-13.9	-13.5	-15.0	-14.7	-14.6	-14.3	-13.9
8H	-14.7	-14.4	-14.2	-14.0	-13.6	-15.0	-14.8	-14.6	-14.4	-14.0
12H	-14.7	-14.5	-14.3	-14.1	-13.6	-15.1	-14.9	-14.6	-14.5	-14.0
12H 4H	-14.5	-14.2	-14.1	-13.9	-13.5	-14.9	-14.6	-14.5	-14.3	-13.9
6H	-14.7	-14.4	-14.2	-14.0	-13.6	-15.0	-14.8	-14.6	-14.4	-14.0
8H	-14.7	-14.5	-14.3	-14.1	-13.6	-15.1	-14.9	-14.6	-14.5	-14.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 4.0 / -28.1					+ 4.7 / -33.0				
1.5H	+ 6.4 / -14.4					+ 7.1 / -14.5				
2.0H	+ 7.7 / - 1.5					+ 7.5 / - 1.5				

CIE Pub.117, 125.3 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -7.2)
 Area: 0.1 m2

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.38V I:0.0235A P:2.5537W PF:0.4715 Freq:50.00Hz Lamp Flux:125.262x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	86	82	91	86	82	90	85	82	79
0.80	98	93	90	98	93	90	97	92	89	86
1.00	102	97	94	101	97	94	100	96	93	90
1.25	105	101	98	104	100	97	103	99	97	93
1.50	108	104	101	107	103	100	105	102	99	95
2.00	110	106	103	109	105	103	106	103	101	96
2.50	111	108	105	110	107	104	107	104	103	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	113	111	109	109	107	106	99
5.00	116	114	112	114	112	111	110	109	108	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.38V I:0.0235A P:2.5537W PF:0.4715 Freq:50.00Hz Lamp Flux:125.262x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

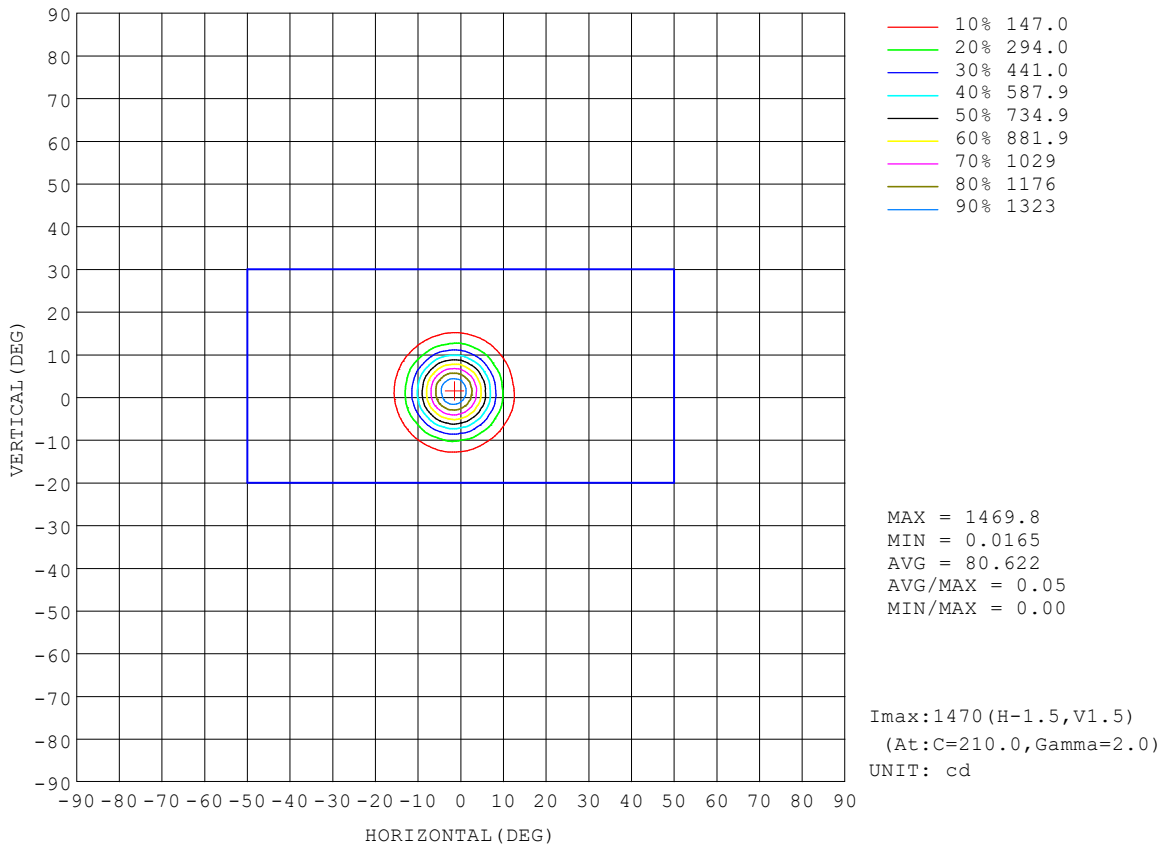


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

AAI Figure

Test:U:230.38V I:0.0235A P:2.5537W PF:0.4715 Freq:50.00Hz Lamp Flux:125.262x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

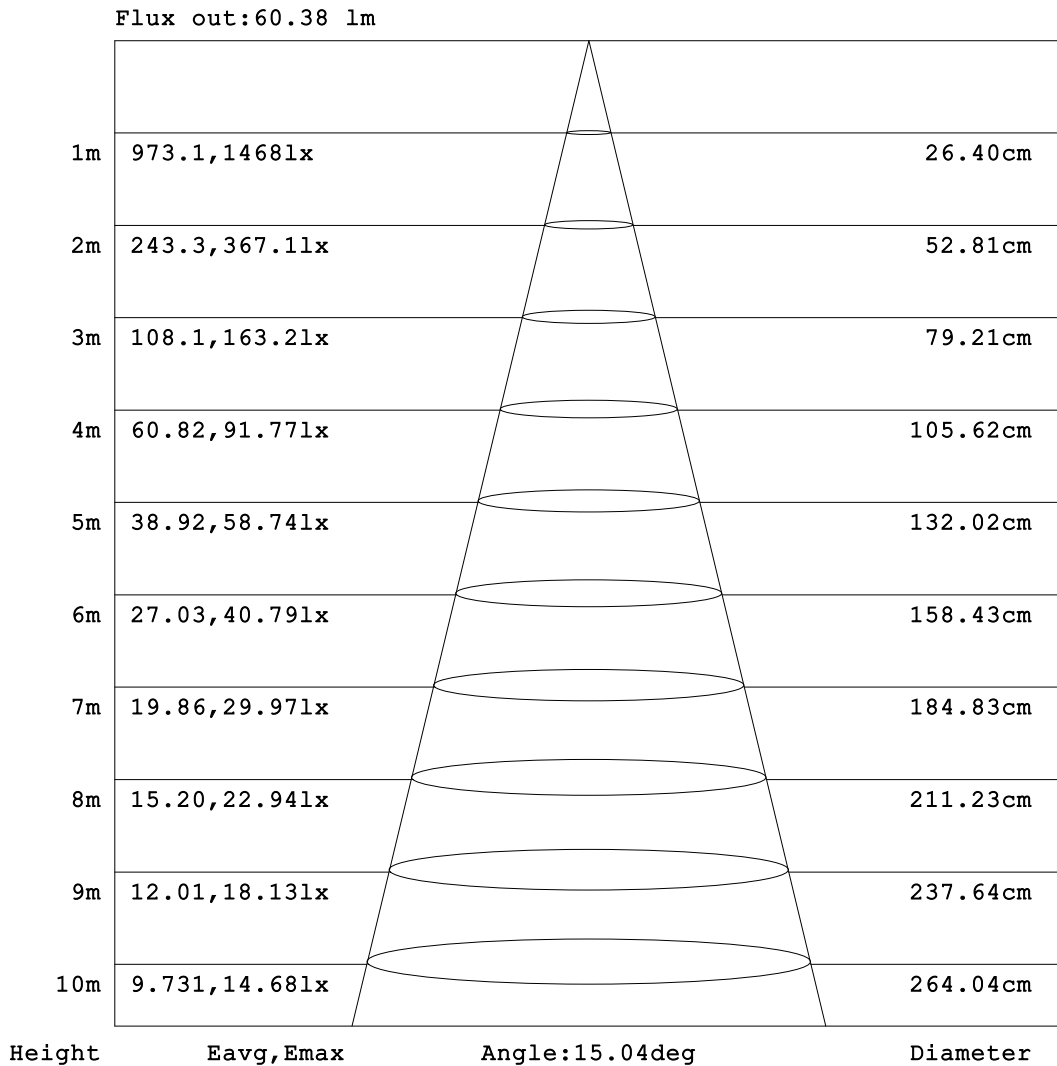


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-11-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:230.38V I:0.0235A P:2.5537W PF:0.4715 Freq:50.00Hz Lamp Flux:125.262x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

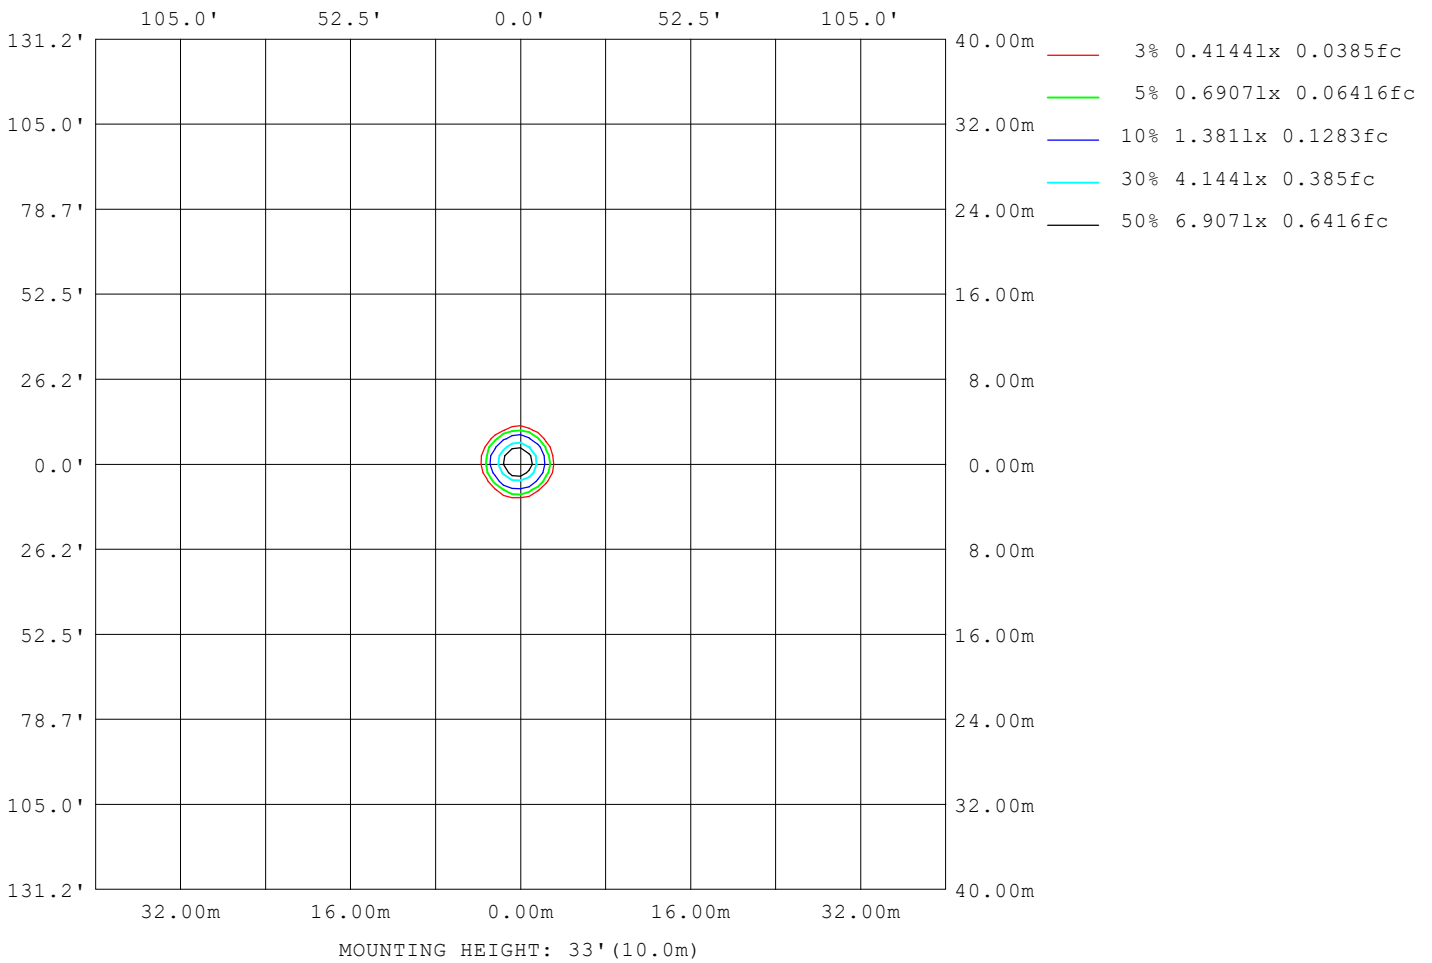

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:230.38V I:0.0235A P:2.5537W PF:0.4715 Freq:50.00Hz Lamp Flux:125.262x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	0
L_0~180 (75) av	0
L_0~180 (85) av	0
L_90~270 (65) av	0
L_90~270 (75) av	0
L_90~270 (85) av	0
L_45 (65) av	0
L_45 (75) av	0
L_45 (85) av	0

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

Planar Illuminance Curve

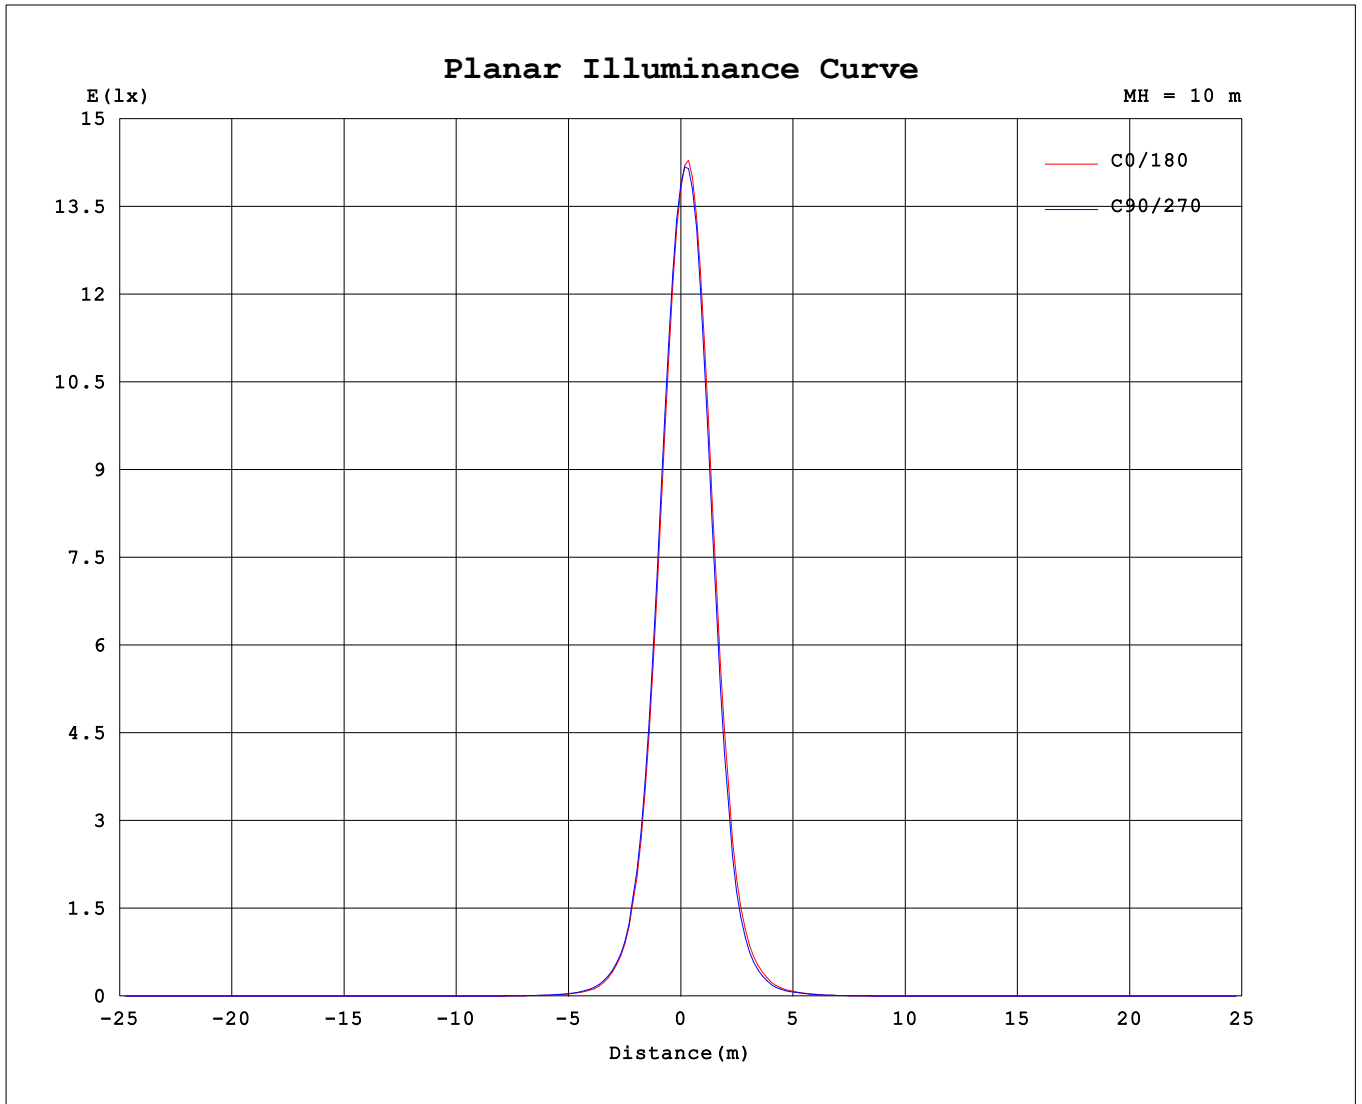

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: DAMIN
 Test Date: 2024-11-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity: 65.0%
 Test Distance: 9.401m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.38V I:0.0235A P:2.5537W PF:0.4715 Freq:50.00Hz Lamp Flux:125.262x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1388	1388	1388	1388	1388	1388	1388	1388	1388	1388	1388	1388	1388	1388	1388	1388	1388	1388	1388
5	845	823	794	803	804	843	871	936	987	1066	1128	1213	1261	1299	1341	1329	1325	1270	1224
10	283	270	252	257	256	281	297	347	374	434	481	551	601	632	672	658	656	598	557
15	76.5	73.5	69.1	68.4	66.7	73.5	79.9	91.3	98.6	113	126	150	170	187	190	186	175	164	150
20	21.1	20.6	19.5	19.8	20.1	22.2	24.3	28.3	29.6	32.5	34.8	42.1	50.1	52.8	52.1	46.3	44.1	42.5	42.1
25	7.57	7.59	7.39	7.41	7.43	8.14	8.78	9.75	10.3	11.2	11.8	13.8	15.6	16.2	16.5	15.4	14.4	13.5	13.1
30	3.38	3.37	3.29	3.17	3.07	3.35	3.72	4.20	4.49	4.66	4.69	5.37	6.28	6.83	7.13	6.69	6.41	5.82	5.76
35	1.67	1.68	1.66	1.50	1.44	1.53	1.84	1.99	2.10	2.12	2.06	2.25	2.60	2.96	3.26	3.22	2.97	2.84	2.77
40	0.78	0.77	0.77	0.62	0.66	0.63	0.87	0.88	0.97	0.96	0.82	0.89	1.03	1.25	1.45	1.49	1.34	1.27	1.24
45	0.26	0.18	0.25	0.19	0.24	0.19	0.27	0.22	0.29	0.25	0.31	0.28	0.34	0.46	0.53	0.57	0.34	0.39	0.32
50	0.13	0.08	0.13	0.07	0.13	0.07	0.14	0.08	0.16	0.10	0.17	0.12	0.13	0.20	0.14	0.20	0.13	0.19	0.13
55	0.05	0.00	0.05	0.00	0.05	0.00	0.05	0.00	0.05	0.01	0.08	0.02	0.03	0.10	0.04	0.10	0.03	0.09	0.01
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.02	0.00	0.02	0.00	0.01	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:DAMIN
 Test Date:2024-11-25

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.473
 Humidity:65.0%
 Test Distance:9.401m [K=1.0000]
 Remarks:

