
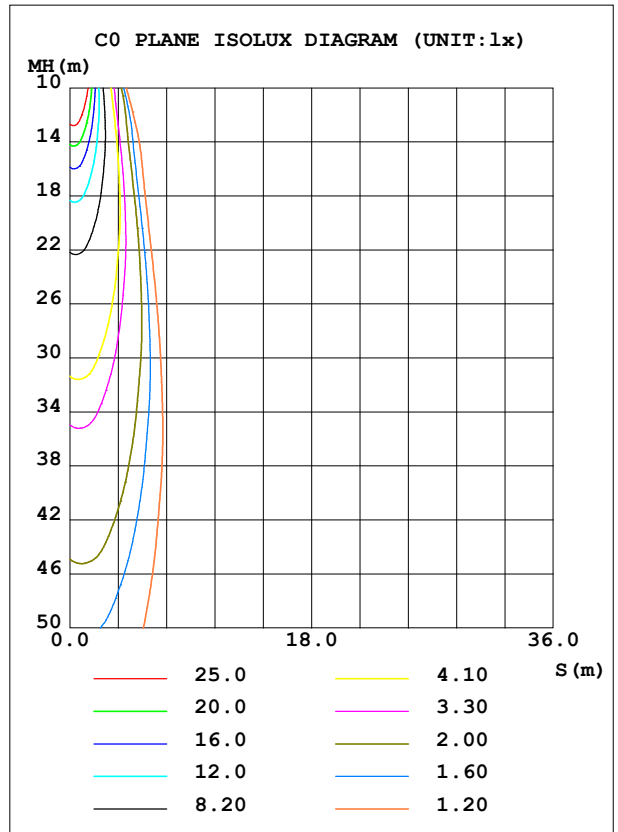


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:220.27V I:0.0811A P:10.472W PF:0.5863 Freq:50.00Hz Lamp Flux:456.477x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 43.59 lm/W
MODEL	MB18-616	I <sub>max</sub> (cd)	4086	S/MH (C0/180)	0.25	
NOMINAL POWER (W)	10	LOR (%)	100.0	S/MH (C90/270)	0.30	
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	456.48	η UP, DN (C0-180)	0.0,43.2	
NOMINAL FLUX (lm)	456.477	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0,56.8	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	219.5	η down (%)	100.0	CIBSE SHR MAX	0.30	

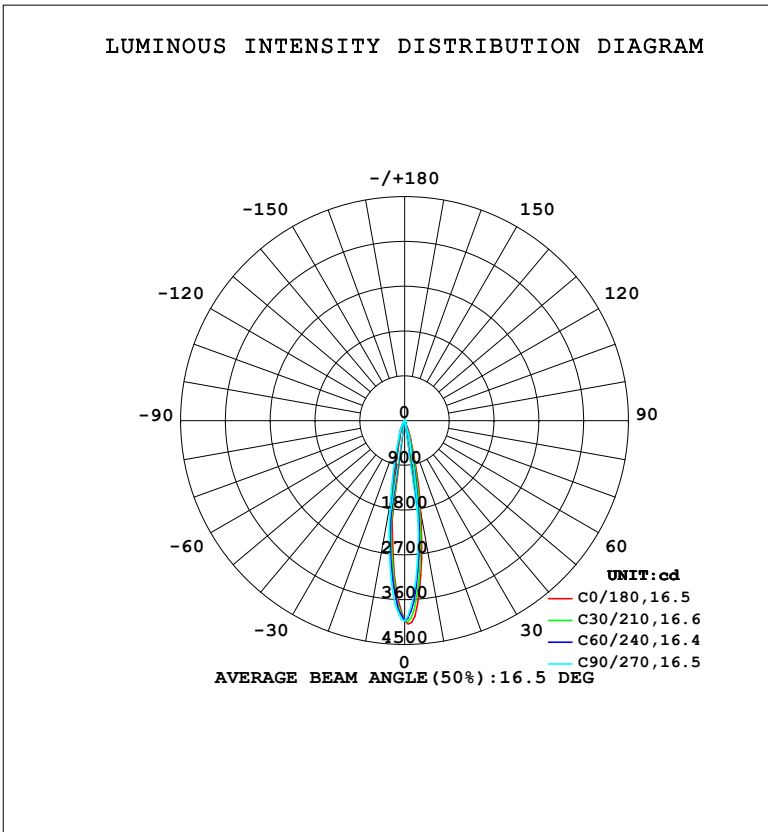

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: DAMIN  
Test Date: 2024-05-30

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
Humidity: 65.0%  
Test Distance: 9.401m [K=1.0000]  
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	1879	1589	1275	1227	1224	1425	1651	1744	0- 10	239.8	239.8	52.5,52.5
20	299.4	85.20	50.23	54.88	162.3	288.2	331.9	338.1	10- 20	162.4	402.2	88.1,88.1
30	24.63	11.54	4.846	9.194	17.00	35.74	54.94	57.60	20- 30	41.96	444.2	97.3,97.3
40	8.994	1.259	0.1513	0.7033	5.050	10.53	13.02	11.69	30- 40	7.848	452.0	99,99
50	2.373	0	0	0	0.9956	3.113	4.322	3.837	40- 50	2.757	454.8	99.6,99.6
60	0.4570	0	0	0	0.2519	1.210	1.634	1.310	50- 60	1.008	455.8	99.8,99.8
70	0.1683	0	0	0	0.0298	0.5897	0.7929	0.5857	60- 70	0.4200	456.2	99.9,99.9
80	0.0181	0	0	0	0	0.2768	0.3664	0.2898	70- 80	0.1946	456.4	100,100
90	0	0	0	0	0	0.1263	0.2164	0.1388	80- 90	0.0871	456.5	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 453.72 lm

%lum = 99.4%

%lamp = 99.4%

Conical surface Flux(130deg): 456.03 lm

%lum = 99.9%


%lamp = 99.9%

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-05-30

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:220.27V I:0.0811A P:10.472W PF:0.5863 Freq:50.00Hz Lamp Flux:456.477x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

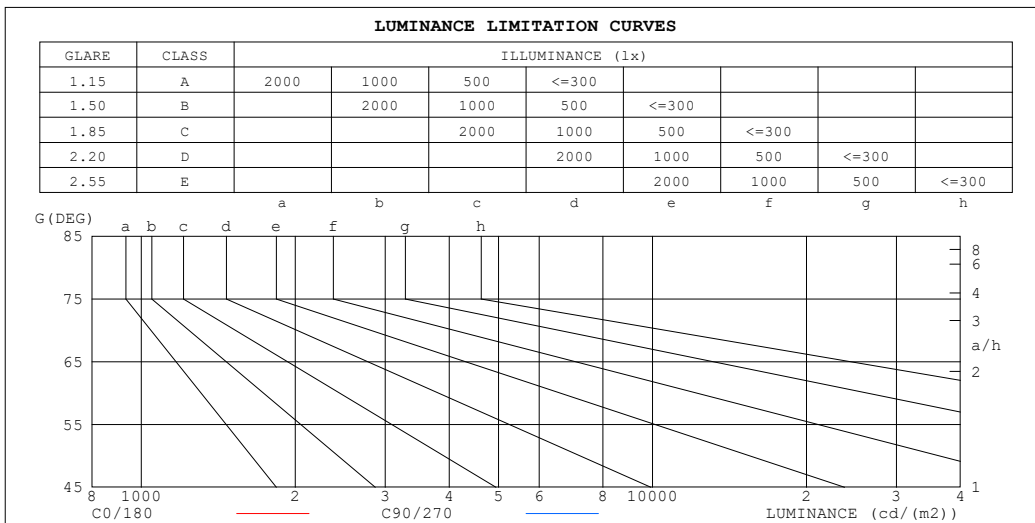

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	0	0
80	10	0
75	33	0
70	49	0
65	64	0
60	92	0
55	164	0
50	370	0
45	720	0


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-05-30

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:220.27V I:0.0811A P:10.472W PF:0.5863 Freq:50.00Hz Lamp Flux:456.477x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio      Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.14	1.12	1.10	1.11	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.02	1.01	.00	.99	.98
2.0	1.09	1.06	1.04	1.07	1.05	1.03	1.04	1.02	1.01	1.02	1.00	.99	.99	.98	.97	.95
3.0	1.05	1.02	.00	1.04	1.01	.99	1.02	.99	.97	.99	.97	.96	.97	.96	.94	.93
4.0	1.02	.98	.96	1.01	.98	.95	.99	.96	.94	.97	.95	.93	.96	.94	.92	.91
5.0	.99	.95	.93	.98	.95	.92	.97	.94	.92	.95	.93	.91	.94	.92	.90	.89
6.0	.96	.93	.90	.96	.92	.90	.95	.92	.89	.93	.91	.89	.92	.90	.88	.87
7.0	.94	.91	.88	.94	.90	.88	.93	.90	.87	.92	.89	.87	.91	.88	.87	.86
8.0	.92	.89	.86	.92	.88	.86	.91	.88	.86	.90	.87	.85	.89	.87	.85	.84
9.0	.90	.87	.84	.90	.86	.84	.89	.86	.84	.88	.86	.84	.88	.85	.84	.83
10.0	.88	.85	.83	.88	.85	.83	.87	.84	.82	.87	.84	.82	.86	.84	.82	.81

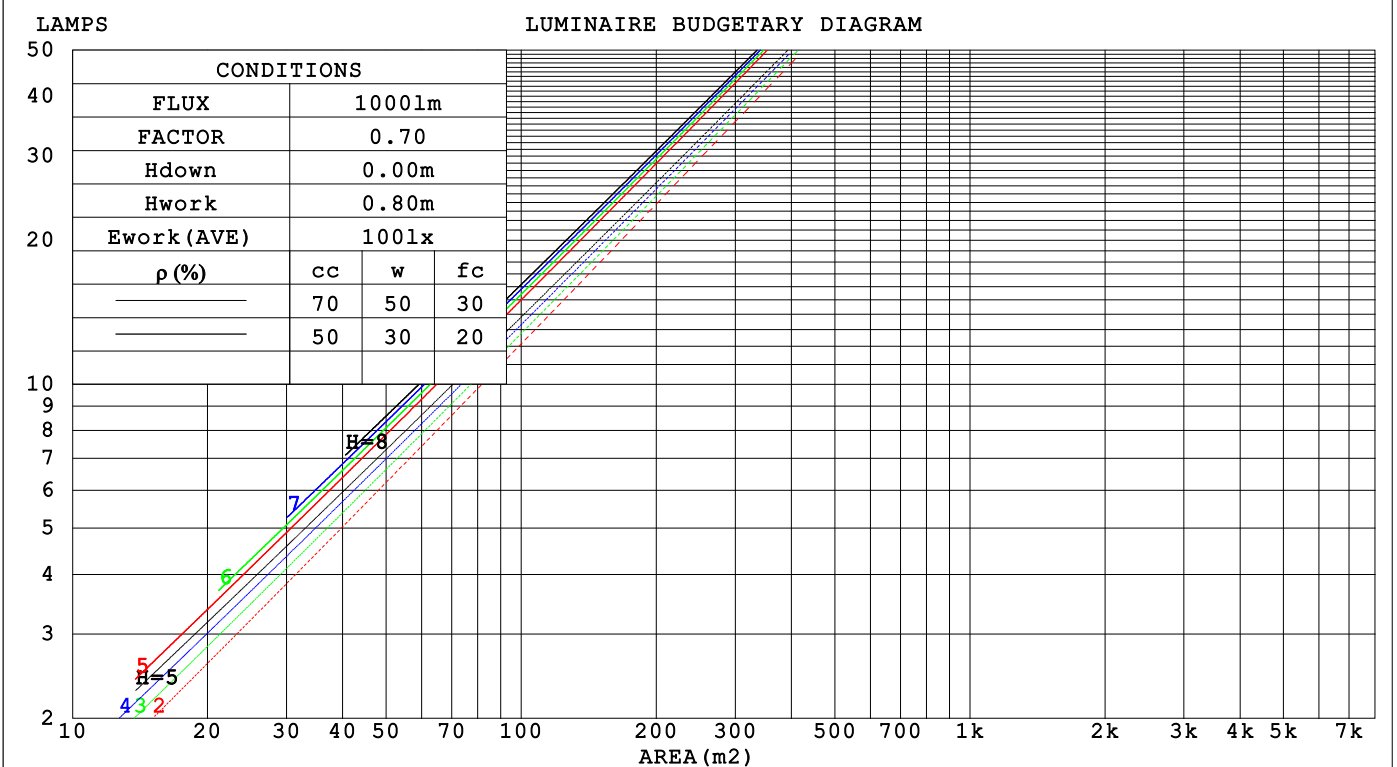

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-05-30

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:220.27V I:0.0811A P:10.472W PF:0.5863 Freq:50.00Hz								
Lamp Flux:456.477x1 lm								
NAME:			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: EVERFINE			SUR.:			Shielding Angle:		

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.124	.070	.022	.117	.067	.021	.105	.060	.019	.093	.054	.017	.083	.048	.015	
2.0	.113	.062	.019	.108	.059	.018	.098	.054	.017	.088	.050	.015	.080	.045	.014	
3.0	.104	.055	.017	.100	.053	.016	.091	.050	.015	.084	.046	.014	.077	.042	.013	
4.0	.097	.050	.015	.093	.049	.014	.086	.046	.014	.080	.043	.013	.074	.040	.012	
5.0	.090	.046	.013	.087	.045	.013	.081	.042	.012	.076	.040	.012	.071	.038	.011	
6.0	.085	.043	.012	.082	.042	.012	.077	.040	.012	.073	.038	.011	.068	.036	.011	
7.0	.080	.040	.011	.078	.039	.011	.074	.037	.011	.069	.036	.010	.066	.034	.010	
8.0	.076	.037	.010	.074	.036	.010	.070	.035	.010	.067	.034	.010	.063	.033	.009	
9.0	.072	.035	.010	.070	.034	.010	.067	.033	.009	.064	.032	.009	.061	.031	.009	
10.0	.069	.033	.009	.067	.033	.009	.064	.032	.009	.062	.031	.009	.059	.030	.009	

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.167	.158	.149	.143	.135	.128	.098	.093	.089	.056	.054	.052	.018	.017	.017	
2.0	.148	.133	.120	.127	.114	.103	.087	.079	.072	.050	.046	.042	.016	.015	.014	
3.0	.133	.113	.098	.114	.098	.085	.078	.068	.059	.045	.040	.035	.014	.013	.011	
4.0	.119	.098	.081	.102	.084	.070	.070	.059	.050	.041	.034	.029	.013	.011	.010	
5.0	.108	.085	.068	.093	.074	.059	.064	.051	.042	.037	.030	.025	.012	.010	.008	
6.0	.099	.075	.058	.085	.065	.050	.058	.045	.036	.034	.027	.021	.011	.009	.007	
7.0	.091	.066	.049	.078	.058	.043	.054	.040	.031	.031	.024	.018	.010	.008	.006	
8.0	.084	.059	.043	.072	.052	.037	.050	.036	.026	.029	.021	.016	.009	.007	.005	
9.0	.078	.054	.037	.067	.046	.032	.046	.033	.023	.027	.019	.014	.009	.006	.005	
10.0	.073	.049	.033	.063	.042	.029	.043	.030	.020	.025	.018	.012	.008	.006	.004	

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-05-30

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:220.27V I:0.0811A P:10.472W PF:0.5863 Freq:50.00Hz										
Lamp Flux:456.477x1 lm										
NAME:			TYPE:				WEIGHT:			
SPEC.:			DIM.:				SERIAL No.:			
MFR.: EVERFINE			SUR.:				Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-1.4	-0.8	-1.2	-0.7	-0.6	-13.4	-12.8	-13.2	-12.7	-12.5
3H	-1.5	-1.0	-1.3	-0.8	-0.6	-13.5	-13.0	-13.3	-12.8	-12.6
4H	-1.6	-1.1	-1.3	-0.9	-0.7	-13.6	-13.1	-13.3	-12.9	-12.7
6H	-1.7	-1.2	-1.4	-1.0	-0.7	-13.7	-13.2	-13.4	-13.0	-12.7
8H	-1.7	-1.2	-1.4	-1.0	-0.8	-13.7	-13.3	-13.4	-13.0	-12.8
12H	-1.8	-1.3	-1.5	-1.1	-0.8	-13.8	-13.3	-13.5	-13.1	-12.8
4H 2H	-1.6	-1.1	-1.4	-0.9	-0.7	-13.6	-13.1	-13.3	-12.9	-12.7
3H	-1.8	-1.3	-1.5	-1.1	-0.8	-13.8	-13.3	-13.5	-13.1	-12.8
4H	-1.9	-1.4	-1.5	-1.2	-0.9	-13.8	-13.4	-13.5	-13.2	-12.9
6H	-2.0	-1.6	-1.6	-1.3	-0.9	-14.0	-13.6	-13.6	-13.3	-12.9
8H	-2.0	-1.7	-1.6	-1.3	-1.0	-14.0	-13.7	-13.6	-13.3	-13.0
12H	-2.1	-1.8	-1.7	-1.4	-1.0	-14.1	-13.8	-13.7	-13.4	-13.0
8H 4H	-2.0	-1.7	-1.6	-1.3	-1.0	-14.0	-13.7	-13.6	-13.3	-13.0
6H	-2.1	-1.8	-1.7	-1.5	-1.0	-14.1	-13.8	-13.7	-13.5	-13.0
8H	-2.2	-1.9	-1.7	-1.5	-1.1	-14.2	-13.9	-13.7	-13.5	-13.1
12H	-2.3	-2.0	-1.8	-1.6	-1.1	-14.3	-14.0	-13.8	-13.6	-13.1
12H 4H	-2.1	-1.8	-1.7	-1.4	-1.0	-14.1	-13.8	-13.7	-13.4	-13.0
6H	-2.2	-1.9	-1.7	-1.5	-1.1	-14.2	-13.9	-13.7	-13.5	-13.1
8H	-2.3	-2.0	-1.8	-1.6	-1.1	-14.3	-14.0	-13.8	-13.6	-13.1
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 5.4 / -14.9					+ 3.4 / - 1.5				
1.5H	+ 7.2 / -22.7					+ 6.0 / - 1.5				
2.0H	+ 9.9 / -28.3					+ 9.3 / - 1.5				

CIE Pub.117, 456.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.7)  
 Area: 0.01 m2

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-05-30

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:220.27V I:0.0811A P:10.472W PF:0.5863 Freq:50.00Hz Lamp Flux:456.477x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	91	85	82	90	85	82	90	85	82	78
0.80	98	93	89	97	92	89	96	92	89	86
1.00	102	97	93	101	96	93	99	96	93	89
1.25	105	101	97	104	100	97	102	99	96	92
1.50	108	103	100	106	103	100	104	101	99	95
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	107	104	107	104	102	97
3.00	113	110	107	111	108	106	108	106	104	98
4.00	115	112	110	112	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-05-30

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:220.27V I:0.0811A P:10.472W PF:0.5863 Freq:50.00Hz Lamp Flux:456.477x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

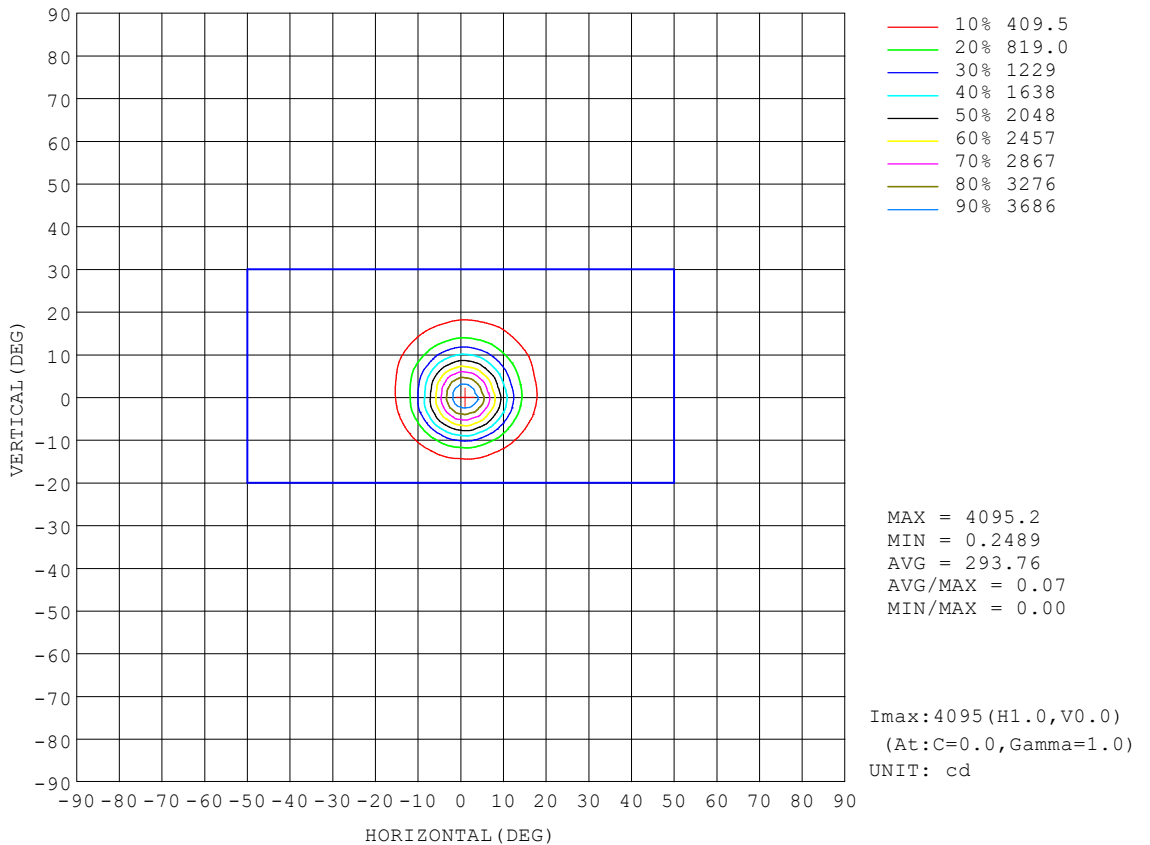


C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-05-30

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:220.27V I:0.0811A P:10.472W PF:0.5863 Freq:50.00Hz Lamp Flux:456.477x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

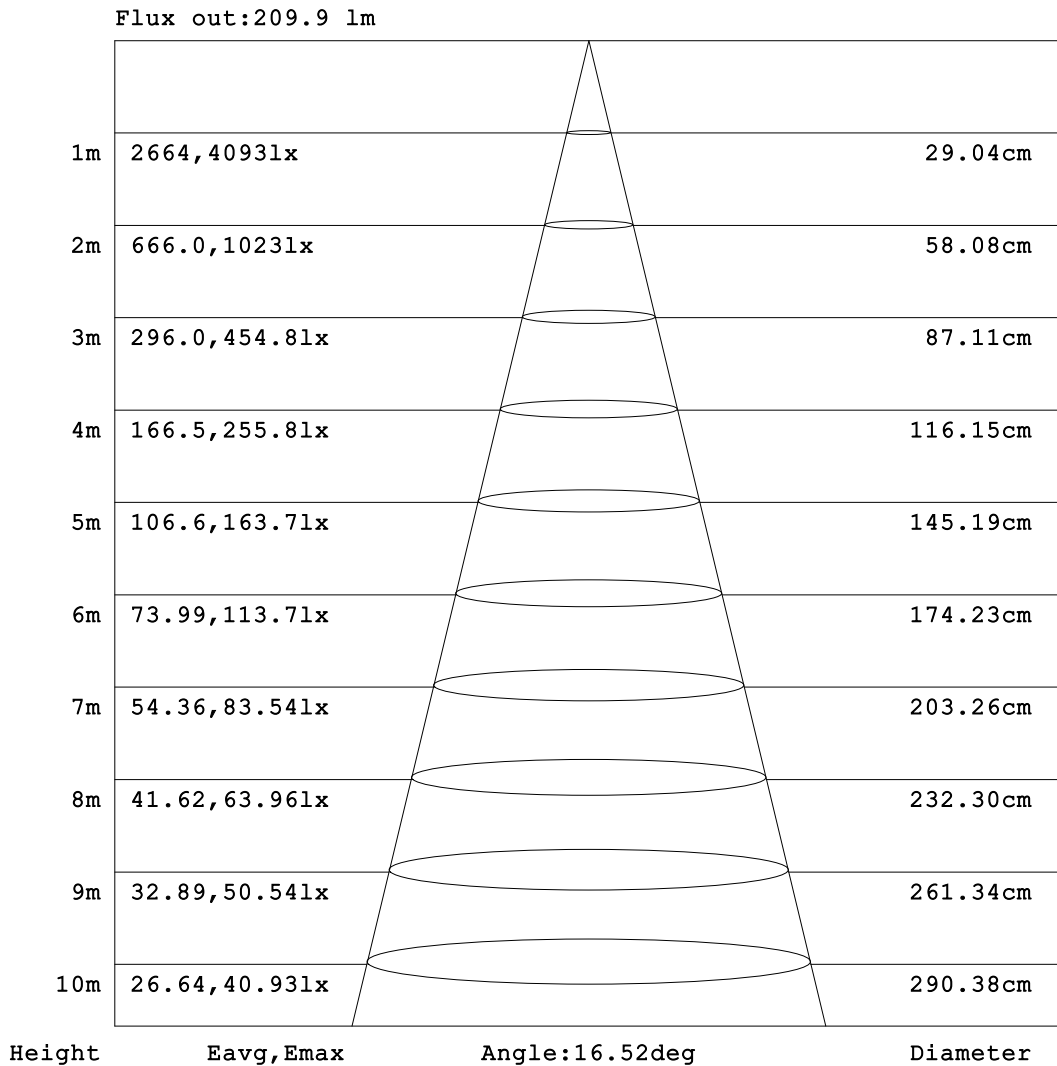


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:DAMIN  
Test Date:2024-05-30

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
Humidity:65.0%  
Test Distance:9.401m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**

Test:U:220.27V I:0.0811A P:10.472W PF:0.5863 Freq:50.00Hz Lamp Flux:456.477x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

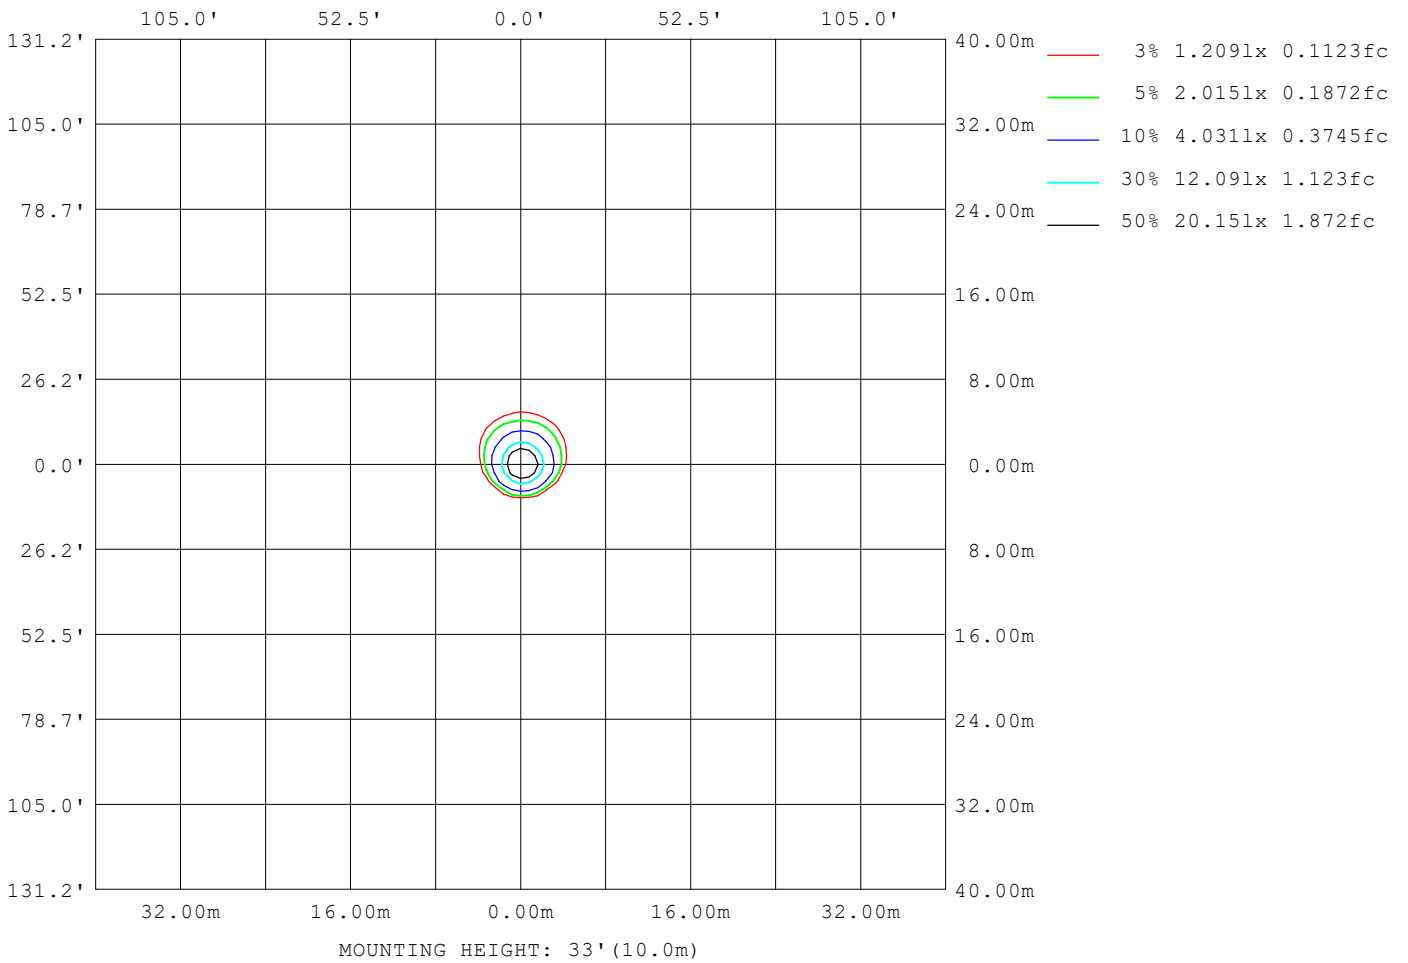

C Range: 0 - 360DEG  
C Interval: 15.0DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:DAMIN  
Test Date:2024-05-30

γ Range: 0 - 90DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
Humidity:65.0%  
Test Distance:9.401m [K=1.0000]  
Remarks:

**LED Avg.L Report**

Test:U:220.27V I:0.0811A P:10.472W PF:0.5863 Freq:50.00Hz Lamp Flux:456.477x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	46
L_0~180 (75) av	16
L_0~180 (85) av	0
L_90~270 (65) av	133
L_90~270 (75) av	106
L_90~270 (85) av	138
L_45 (65) av	101
L_45 (75) av	77
L_45 (85) av	112

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-05-30

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

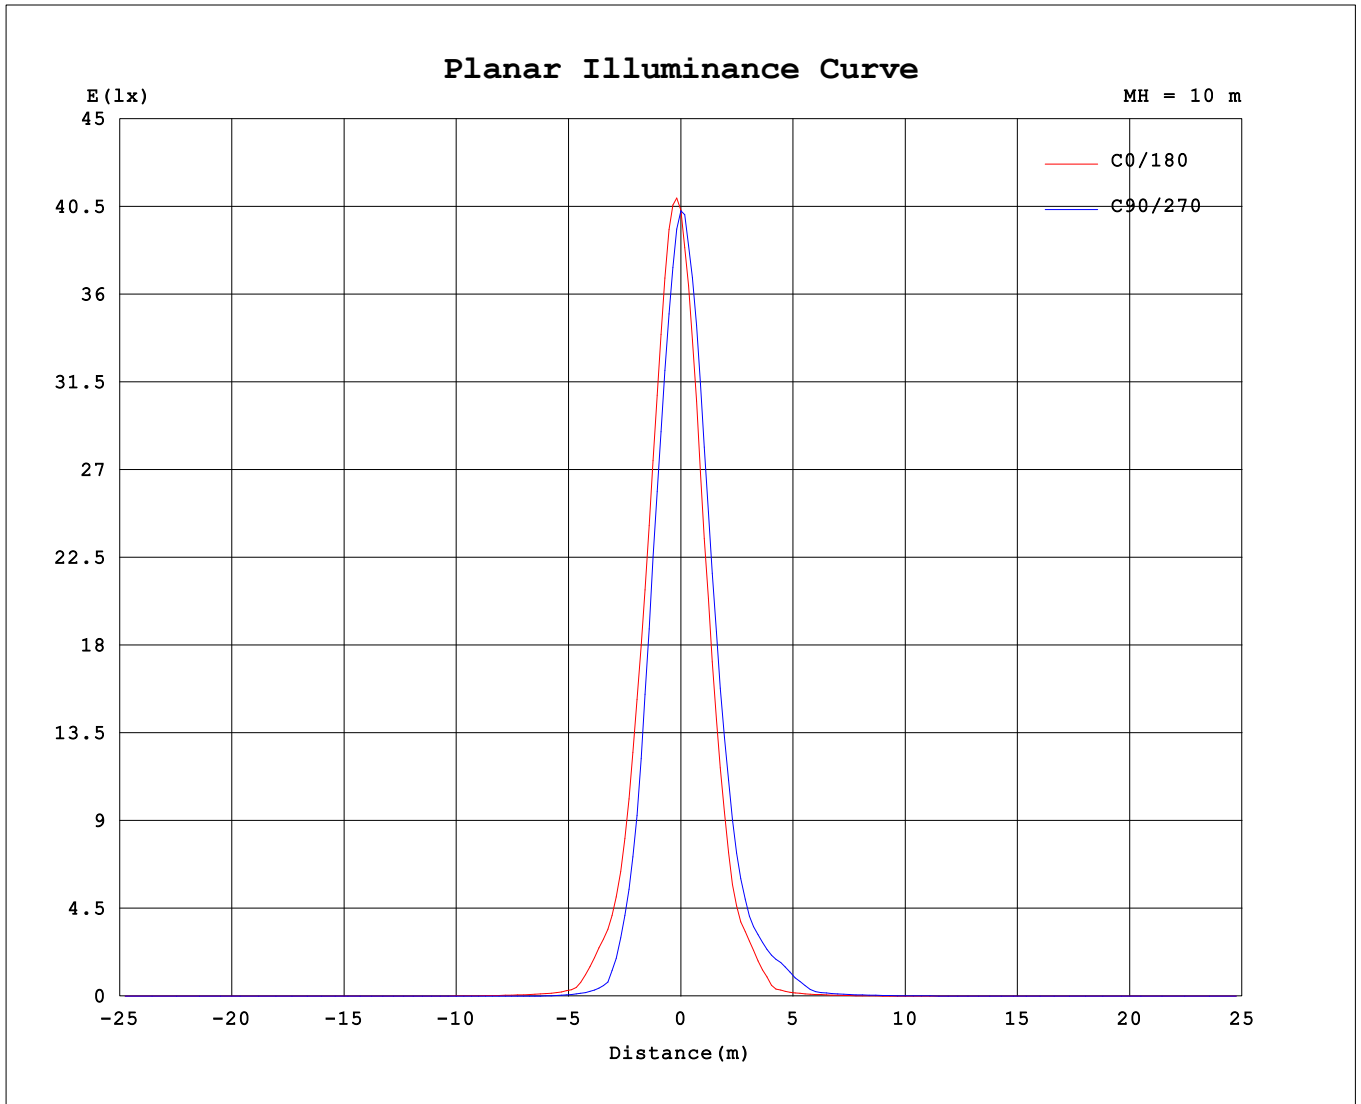

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators: DAMIN  
 Test Date: 2024-05-30

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity: 65.0%  
 Test Distance: 9.401m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.27V I:0.0811A P:10.472W PF:0.5863 Freq:50.00Hz		
Lamp Flux:456.477x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	4021	4021	4021	4021	4021	4021	4021	4021	4021	4021	4021	4021	4021	4021	4021	4021	4021	4021	4021
5	3426	3392	3253	3213	3034	3009	2923	2916	2802	2812	2757	2778	2712	2725	2843	2887	3022	3053	3175
10	1879	1854	1706	1589	1441	1368	1275	1249	1201	1227	1232	1284	1224	1265	1373	1425	1526	1572	1651
15	708	632	560	493	416	384	332	334	333	364	389	413	422	449	527	561	594	622	668
20	299	225	145	85.2	61.2	54.3	50.2	50.4	49.8	54.9	61.5	109	162	225	271	288	302	318	332
25	60.4	45.6	33.2	24.1	19.6	17.4	15.8	17.5	18.5	17.8	19.3	26.9	33.9	45.5	107	160	176	185	201
30	24.6	22.3	15.3	11.5	9.54	6.32	4.85	6.84	8.78	9.19	8.74	13.0	17.0	20.3	26.4	35.7	55.6	58.8	54.9
35	14.8	12.0	6.77	5.22	3.05	1.31	0.89	1.12	2.29	3.69	3.88	5.43	9.67	12.5	13.9	17.8	19.5	20.7	22.5
40	8.99	5.64	2.34	1.26	0.40	0.16	0.15	0.11	0.27	0.70	1.41	2.18	5.05	7.75	8.34	10.5	11.4	11.4	13.0
45	5.08	2.11	0.73	0.18	0.06	0.00	0.00	0.00	0.04	0.09	0.44	0.98	2.27	4.60	5.00	5.83	7.10	7.04	7.81
50	2.37	0.69	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.43	1.00	2.41	2.90	3.11	4.12	4.23	4.32
55	0.94	0.31	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.18	0.50	1.21	1.71	1.85	2.51	2.67	2.52
60	0.46	0.14	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.25	0.61	0.98	1.21	1.60	1.77	1.63
65	0.27	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.38	0.56	0.83	1.04	1.21	1.12
70	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.24	0.35	0.59	0.68	0.84	0.79
75	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.20	0.40	0.46	0.58	0.55
80	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.12	0.28	0.29	0.42	0.37
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.19	0.19	0.29	0.24
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.13	0.14	0.22	0.22

C Range: 0 - 360DEG  
 C Interval: 15.0DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:DAMIN  
 Test Date:2024-05-30

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.473  
 Humidity:65.0%  
 Test Distance:9.401m [K=1.0000]  
 Remarks:

